



Topaz Specification Sheet


Description: Rigid Conduit Bodies, Malleable Iron C Type

Standard Material: Malleable Iron

Standard Finish: Zinc Plated, Aluminum Enameled

Features: Tapered threaded hubs - NPT

Application: To provide access to conductors for pulling, splicing and maintenance

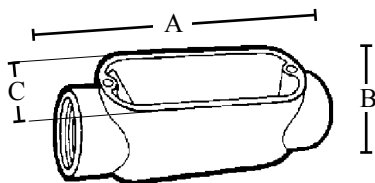

E195124

TOPAZ CAT #	A	B	C	Max No. Conductors	Internal Volume (in ³)
C1M	5.35	1.31	1.31	-	4.5
C2M	6.00	1.62	1.48	3#6	7.5
C3M	7.06	1.88	1.75	3#4	12.5
C4M	9.25	2.50	2.40	3#2	32.3
C5M	9.25	2.67	2.40	3#1/0	35.3
C6M	11.50	3.29	3.05	3#3/0	73
C7M	15.00	3.9063	4.312	3-250MCM	138
C8M	15.125	4.75	4.312	3-250MCM	170
C9M	18.125	5.1875	4.875	3-350MCM	300
C10M	18.125	5.5625	4.875	3-350MCM	328

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
C1M	20000	1/2"	-	10	7
C2M	20010	3/4"	-	10	23
C3M	20020	1"	-	5	6
C4M	20030	1 1/4"	-	10	23
C5M	20040	1 1/2"	-	10	26
C6M	20050	2"	-	5	26
C7M	20051	2 1/2"	-	5	10
C8M	20052	3"	-	1	12
C9M	20053	3 1/2"	-	1	21
C10M	20054	4"	-	1	23

Approved by Topaz Quality Control & Engineering



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488