




Topaz Specification Sheet

Description: Rigid Conduit Bodies with Cover and Gasket - Rigid LR Type

Standard Material: Aluminum Die Cast Copper Free
Cover stamped steel
Gasket - Neoprene Rubber

Features: Tapered threaded hubs - NPT
Suitable for use in concrete.
Wet Location

Application: To provide access to conductors for pulling, slicing and maintenance

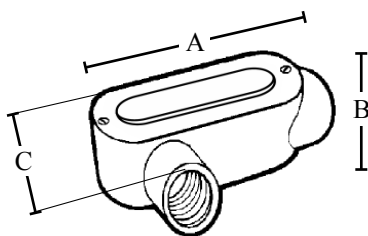

TOPAZ CAT #	A	B	C	Max No. Conductors
LR1CG	4.295	1.370	2.030	1 #6AWG
LR2CG	5.090	1.625	2.330	2 #6AWG
LR3CG	5.915	1.900	2.650	3 #6AWG
LR4CG	7.894	2.770	3.385	3 #2AWG
LR5CG	7.894	2.770	3.385	3 #2AWG
LR6CG	10.134	3.335	3.810	3 #2/0AWG
LR7CG	13.000	4.063	5.709	3 #4/0AWG
LR8CG	12.750	4.682	5.506	3 #250MCM
LR9CG	15.500	5.452	6.171	3 #350MCM
LR10CG	15.500	5.452	6.171	4 #350MCM

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
LR1CG	21241	1/2"	10	100	36
LR2CG	21251	3/4"	10	50	28
LR3CG	21261	1"	5	25	17
LR4CG	21271	1 1/4"	2	10	15
LR5CG	21281	1 1/2"	2	10	18
LR6CG	21291	2"	1	5	14
LR7CG	21301	2 1/2"	—	1	7
LR8CG	21311	3"	—	1	7
LR9CG	21321	3 1/2"	—	1	10
LR10CG	21331	4"	—	1	10

Approved by Quality Control: John Cavalieri



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488