



Topaz Specification Sheet


Description: Rigid Conduit Bodies, Malleable Iron T Type

Standard Material: Malleable Iron

Standard Finish: Zinc Plated, Aluminum Enameled

Features: Tapered threaded hubs - NPT

Application: To provide access to conductors for pulling, splicing and maintenance

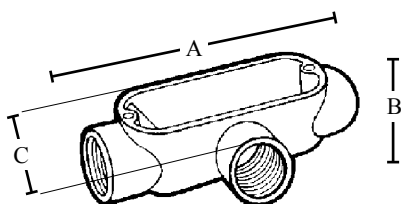

TOPAZ CAT #	A	B	C	Max No. Conductors	Internal Volume (in ³)
T1M	5.35	1.31	2.02	-	6
T2M	6.00	1.62	2.22	3#6	9.5
T3M	7.06	1.88	2.56	3#4	15
T4M	7.25	2.50	3.50	3#2	33
T5M	9.25	2.67	3.50	3#1	36
T6M	11.50	3.29	4.25	3#2/0	75
T7M	15.00	3.9375	5.718	3#4/0	138
T8M	15.125	4.75	8.875	3#4/0	170
T9M	18.125	5.2031	6.812	3 350MCM	300
T10M	18.125	5.5625	7.203	3 350MCM	328

TOPAZ CAT #	UPC#	SIZE	SHIP CASE	WT/ CASE
T1M	21830	1/2"	10	7
T2M	21840	3/4"	10	10
T3M	21850	1"	5	16
T4M	21860	1 1/4"	5	28
T5M	21870	1 1/2"	2	29
T6M	21880	2"	1	12
T7M	21890	2 1/2"	1	12
T8M	21900	3"	1	15
T9M	21910	3 1/2"	1	27
T10M	21920	4"	1	28

Approved by Topaz Quality Control & Engineering



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488