



GE  
Lighting

10488 - GE Mod-U-line® Starcoat® T8

F32T8/SPX41/U/6

## Product Photo



## GENERAL CHARACTERISTICS

|                                 |                    |
|---------------------------------|--------------------|
| Base Description                | Medium Bi-Pin      |
| Base Face to Top of Lamp Max    | 22.250             |
| Base Type                       | Pin/Plug-In        |
| Mercury Content                 | 90 mg              |
| Mercury-Picogram per mean lm hr | 1711               |
| Starting Temp (MIN) C-degrees   | 10 °C              |
| Bulb Material                   | Soda lime          |
| Rated Life Hours-nominal        | 20000 h            |
| Primary Application             | Full Wattage       |
| Product Technology              | Linear Fluorescent |
| Base                            | G13                |
| Bulb Shape                      | T8                 |

## PHOTOMETRIC CHARACTERISTICS

|                                |         |
|--------------------------------|---------|
| Mean Lumens nominal            | 2630 lm |
| Nominal Initial Lumen per Watt | 88      |
| Initial Lumens-nominal         | 2800 lm |
| Color Rendering Index-CRI      | 82      |
| Color Temperature              | 4100 K  |

## PRODUCT INFORMATION

|                                  |                 |
|----------------------------------|-----------------|
| Product Code                     | 10488           |
| Description                      | F32T8/SPX41/U/6 |
| Alternative Unit Of Measure      | Case            |
| Standard Package Quantity        | 12              |
| Ean UPC                          | 043168104883    |
| Standard Package GTIN            | 10043168104880  |
| No Of Items Per Sales Unit       | 1               |
| No Of Items Per Standard Package | 12              |
| Sales Unit                       | Unit            |
| UCC                              | 043168104883    |

## DIMENSIONS

|                               |         |
|-------------------------------|---------|
| Diameter                      | 1 in    |
| Bulb Diameter in Bend <Max>   | 1.15 in |
| Bulb Diameter in Bend <Min>   | 0.89 in |
| Bulb Diameter in Legs <Max>   | 1.1 in  |
| Bulb Diameter in Legs <Min>   | 0.94 in |
| Lamplegs Center-Center Length | 6 in    |
| Nominal Length                | 22.5 in |

## ELECTRICAL CHARACTERISTICS

|  |                  |
|--|------------------|
| Current Crest Factor (MAX)                           | 1.7              |
| Open Circuit Voltage (rapid start) Min @ Temperature | 315.00 V @ 10 °C |
| Cathode Resistance Ratio - Rh/Rc (MIN)               | 4.250            |
| Cathode Resistance Ratio - Rh/Rc (MAX)               | 6.500            |
| Rated power (Watts)                                  | 32 W             |

## CAUTIONS & WARNINGS


### Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

### Warning

- Risk of Electric Shock
- Turn power off before inspection installation or removal.



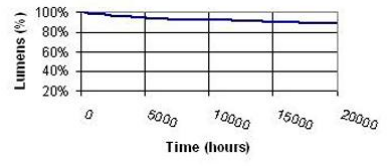

Oct 1, 2015 4:13:22 AM For additional information, visit [www.gelighting.com](http://www.gelighting.com)