



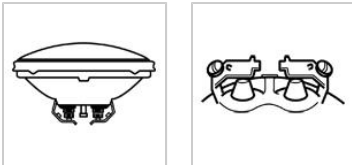

GE
Lighting

14554 - 25PAR36/NSP

GE PAR36 - Narrow Spot

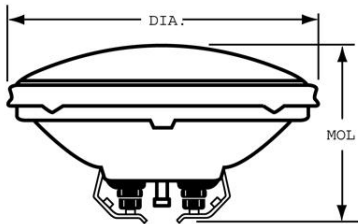

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life	2000.0 hrs
Primary Application	Narrow Spot

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	150.0
Beam Spread	9.0 °
Beam Spread - Horizontal	9.0 - 50.0 °
Beam Spread - Vertical	9.0 - 50.0 °
Center Beam Candlepower (CBCP)	2600.0
Max. Beam Candlepower (MBCP) (MAX)	2600.0
Nominal Initial Lumens per Watt	6

ELECTRICAL CHARACTERISTICS

Wattage	25.0
Voltage	12.0

DIMENSIONS

Maximum Overall Length (MOL)	2.7500 in(69.8 mm)
Bulb Diameter (DIA)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	14554
Description	25PAR36/NSP
Standard Package	Case
Standard Package GTIN	00043168145541
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168906449

NOTES

- Filament shield masks direct light
- Top end of bulb is opaque-coated to absorb upward light