



GE
Lighting

23083 - GE Cool White T12

F64T12CW/HO 15PK

GENERAL CHARACTERISTICS

Base Description	Recessed Double Contact
Base Type	Pin/Plug-In
Mercury Content	90 mg
Mercury-Picogram per mean lm hr	1540
Starting Temp (MIN) C-degrees	-29 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	12000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	R17d
Bulb Shape	T12

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	4870 lm
Nominal Initial Lumen per Watt	70
Initial Lumens-nominal	5600 lm
Color Rendering Index-CRI	60
Color Temperature	4100 K

PRODUCT INFORMATION

Product Code	23083
Description	F64T12CW/HO 15PK
Alternative Unit Of Measure	Case
Standard Package Quantity	15
Ean UPC	043168230834
Standard Package GTIN	10043168230831
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
Sales Unit	Unit
UCC	043168230834

DIMENSIONS

Bulb Diameter (DIA) <Max>	1.59 in
Bulb Diameter (DIA) <Min>	1.41 in
Diameter	1.5 in
Nominal Length	64 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	80 W



CAUTIONS & WARNINGS


Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
- Turn power off before inspection installation or removal.



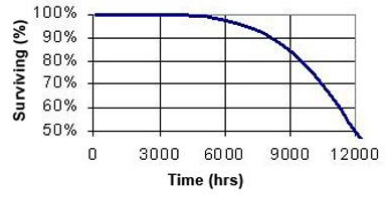

Sep 30, 2015 9:01:39 AM For additional information, visit www.gelighting.com