



GE  
Lighting

## 46763 - GE Ecolux® Starcoat® T5

### F54W/T5/865/ECO

☞ Passes TCLP, which can lower disposal costs.

## Product Photo



## GENERAL CHARACTERISTICS

Base Description	Miniature Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	2.5 mg
Mercury-Picogram per mean lm hr	19.1
Rated Life Rapid Start - Hrs	30000 h @ 3 h 36000 h @ 12 h
Starting Temp (MIN) C-degrees	-20 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	30000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	G5
Bulb Shape	T5

## PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	4370 lm
Nominal Initial Lumen per Watt	88
Color Rendering Index-CRI	85

## PRODUCT INFORMATION

Product Code	46763
Description	F54W/T5/865/ECO
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168467636
Standard Package GTIN	10043168467633
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168467636

## DIMENSIONS

Bulb Diameter (DIA) <Max>	0.67 in
Diameter	0.62 in
Face to End of Opposing Pin (B) <Max>	45.52 in
Face to End of Opposing Pin (B) <Min>	45.42 in
Nominal Length	45.2 in

## ELECTRICAL CHARACTERISTICS

Scotopic/Photopic Ratio	2.2
Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	520.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	54 W



## CAUTIONS & WARNINGS


### Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

### Warning

- Risk of Electric Shock
- Turn power off before inspection installation or removal.



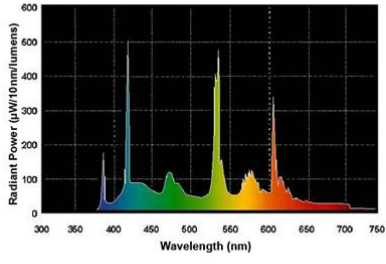

Dec 3, 2018 7:09:57 AM For additional information, visit [www.gelighting.com](http://www.gelighting.com)