

# Power Mod™

Commercial K-Base Meter Stacks (type WMK) are designed to meet the requirements of those utilities specifying bolt-in meter sockets for 400 and 600 Amp residential and commercial applications.

Features include:

- QuickSystem™ features
- Exclusive Landis & Gyr K4, K5, & K7 meter sockets
- 1 position K4, K5, K7 modules with 400 & 600 Amp tenant mains
- 2 position K7 module with 400 Amp tenant main
- Space saving design

## K-Base quick reference

- 400A & 600A 1-2 positions
- 1200A Thru bus-rating
- UL Standard # UL67
- UL file # E27100
- AIC Rating (25k)
- Voltage
  - Single Phase 120/240V AC Max
  - Three In Single Phase Out 208Y/120V AC
  - Three Phase 240V AC Max
- All swing latches and rivets are stainless steel
- NEMA 3R rated
- G90 Galvanized Steel
- ANSI 61 Paint



## K-Base Meter Stacks

# Power Mod: K-Base

## Features



High quality  
Landis & Gyr bolt  
on meter base



Connecting cross bus rated  
1200 Amps



External main  
service disconnect  
Provides safety with quick  
convenient access to disconnect  
made externally. Eliminates taking  
time to remove cover to disconnect



# Power Mod: K-Base


## Features



**Siemens  
exclusive  
feature**


### QuickConnect™

QuickConnect reduces bussing connections from many to one- ensuring a single reliable connection instead of multiple connections.



### QuickTorque™

Eliminates the need for time consuming torque readings, this breakaway nut provides the correct indication of torque of the QuickConnect. When tightened, the outer head twists off at the proper torque for connection, leaving a single nut for future maintenance.

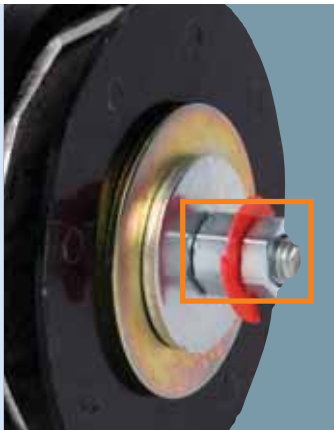

**Siemens  
exclusive  
feature**

### QuickBolt™

QuickBolt eliminates the requirement to line up mechanical connections- instead bolts remain retracted until the openings lineup - allowing the bolts to protrude through automatically. Springs push the bolts through and provide positive pressure to keep bolts in place while wingnuts are attached and tightened.



### Mounting ear

Pivot factory installed mounting ears to minimum or maximum position to provide additional stability when mounting equipment onto wall.



**Siemens  
exclusive  
feature**

### QuickRoll™

QuickRoll eliminates the typical metal brackets for mounting modules to the wall. Instead of metal scraping metal QuickRoll allows the module to glide down the mounting rail via a durable nylon wheel inside mounting bracket.

# Power Mod: K-Base

## Catalog numbers

### Commercial meter stacks: K-Base bolt-in, 25k AIC<sup>③ ⑥</sup>

Catalog number	Meter positions per stack	Max. tenant breaker (Amps)	Breaker provision <sup>④</sup>	Dimensions (inches) <sup>①</sup>			Phase	KO drawing no.
				Height	Width	Depth		

#### 1-phase, 3-wire SN, incoming and outgoing, K4 K-Base bolt-in

WMK11400R <sup>④</sup>	1	400	JXD62B400 Factory Inst.	54.00	19.25	10.00	—	KB-1
WMK11600R	1	600	LXD62B600 Factory Inst.	54.00	19.25	10.00	—	KB-1

#### 3-phase, 4-wire SN, incoming and 1-phase, 3-wire SN outgoing, K5 K-Base bolt-in<sup>② ④</sup>

WMK12400RJ <sup>④</sup>	1	400	JXD62B400 Factory Inst.	54.00	19.25	10.00	AB	KB-2
-------------------------	---	-----	----------------------------	-------	-------	-------	----	------

#### 3-phase, 4-wire SN, incoming and outgoing, K7 K-Base bolt-in<sup>⑤</sup>

WMK13400RJ <sup>④</sup>	1	400	JXD63B400 Factory Inst.	54.00	19.25	10.00	—	KB-2
WMK23400RJ <sup>④</sup>	2			72.88	27.00	11.00	—	KB-3
WMK13600RJ	1	600	LXD63B600 Factory Inst.	54.00	19.25	10.00	—	KB-2

- ① Dimensions shown are representative of outside box dimensions and do not include allowances for mounting bumps, hubs, or hardware protrusions.
- ② Not for use on 3-Phase 4-wire delta systems
- ③ Max AIC determined by maximum AIC of tenant breakers when used in conjunction with a meter socket. Higher overall ratings may be achieved through approved series rating combinations
- ④ Alternate amperage breakers are available. Please see table below for suffix that needs to be added for ordering. Extended leadtime may apply. Contact sales office for more details.
- ⑤ Rated for use with 240/120V Delta systems
- ⑥ Commerical Stacks are not field phaseable


### Alternate amperage breakers

Add Suffix ➤	1 Meter Position Per Stack	Breaker Amperage
	T1	200A
	T2	250A
	T3	300A
	T4	350A


Add Suffix ➤	2 Meter Positions Per Stack	Breaker Amperage
	T5	200A/200A
	T6	200A/250A
	T7	200/300A
	T8	200/350A
	T9	200/400A
	T10	250A/300A
	T11	250A/350A
	T12	250A/400A
	T13	300A/300A
	T14	300A/350A
	T15	300A/400A
	T16	350A/350A
	T17	350A/400A

# Power Mod: K-Base

## Knockout diagrams

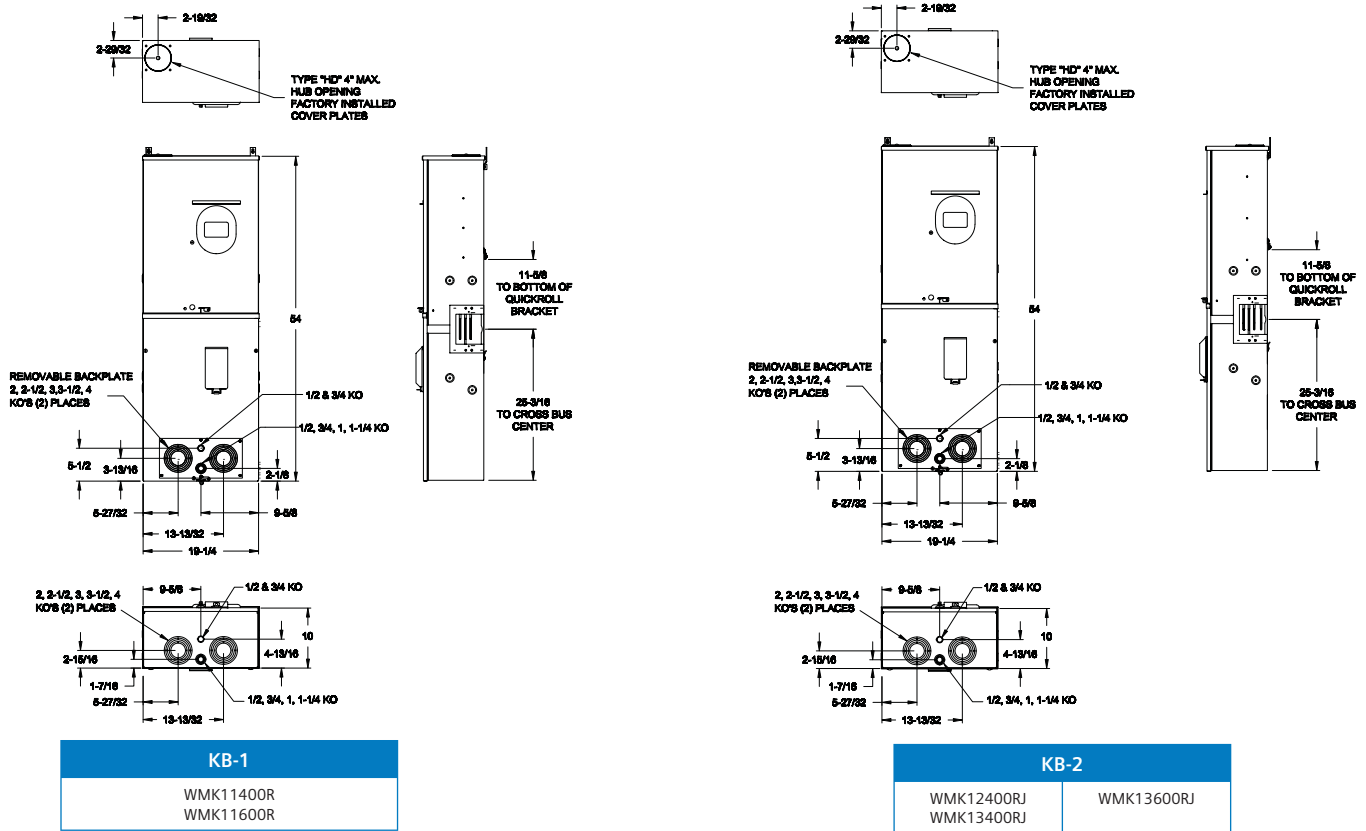

## Schematics

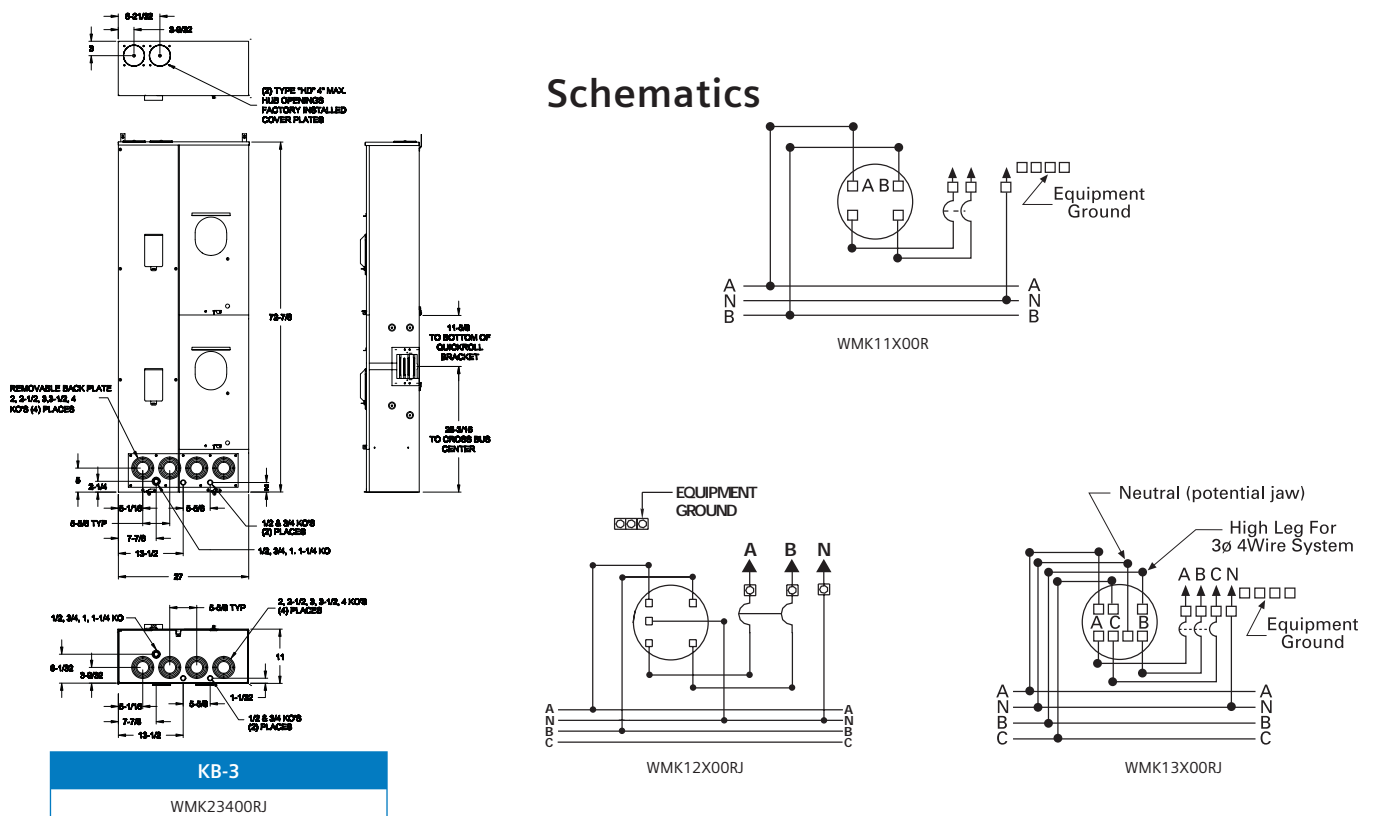

## Catalog Number Logic Example

W

M

K

1

1

400

R

J

### WML

WML = NEMA 3R Lever  
Meter Stack

### Positions

1

2

### Amperage

400

600

### 5th jaw

J = 5th jaw installed (7 jaws for 3-phase in/out)

BLANK = No 5th jaw

### Phase

1 = Single phase

2 = 3-phase in/single out

3 = 3-phase

### Cover

R = Ringless

BLANK = Ring Type