



PL-C Cluster 2-Pin Base

PL-C 26W/835/2P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

General Information		Operating and Electrical	
Cap-Base	G24D-3 [G24d-3]	Power (Rated) (Nom)	26.5 W
Life to 10% Failures (Nom)	6500 h	Lamp Current (Nom)	0.335 A
Life to 50% Failures (Nom)	10000 h	Temperature	
LSF 2000 h Rated	99 %	Design Temperature (Nom)	28 °C
LSF 4000 h Rated	98 %	Controls and Dimming	
LSF 6000 h Rated	92 %	Dimmable	No
LSF 8000 h Rated	78 %	Mechanical and Housing	
Light Technical		Cap-Base Information	2P
Color Code	835 [CCT of 3500K]	Approval and Application	
Initial lumen (Nom)	1800 lm	Energy Efficiency Label (EEL)	B
Luminous Flux (Rated) (Nom)	1800 lm	Mercury (Hg) Content (Nom)	1.4 mg
Color Designation	White (WH)	Energy Consumption kWh/1000 h	32 kWh
Correlated Color Temperature (Nom)	3500 K	Product Data	
Luminous Efficacy (rated) (Nom)	68 lm/W	Order product name	PL-C 26W/835/2P/ALTO 10PK
Color Rendering Index (Nom)	82	EAN/UPC - Product	046677111649
LLMF 2000 h Rated	92 %	Order code	383232
LLMF 4000 h Rated	87 %		
LLMF 6000 h Rated	83 %		
LLMF 8000 h Rated	81 %		

PL-C Cluster 2-Pin Base


Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927906183530

Net Weight (Piece)	64.300 g
--------------------	----------

Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 26W/835/2P/ALTO 10PK	27.1 mm	27.1 mm	130.5 mm	149.0 mm	171.4 mm

PL-C 26W/835/2P

Photometric data

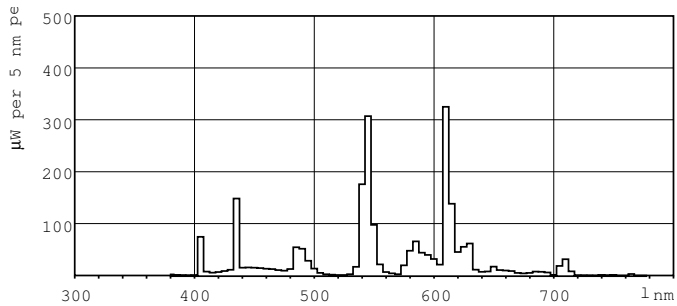


Lightcolor /835

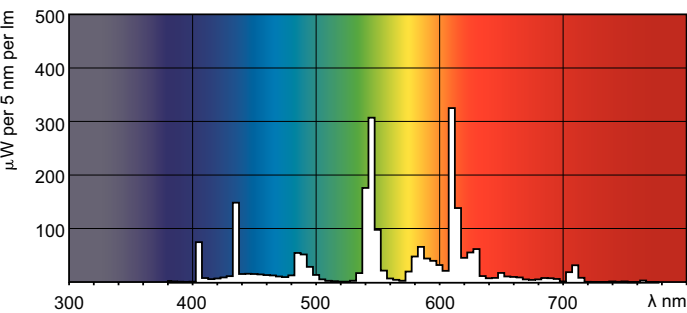


Lightcolor /835

Lifetime

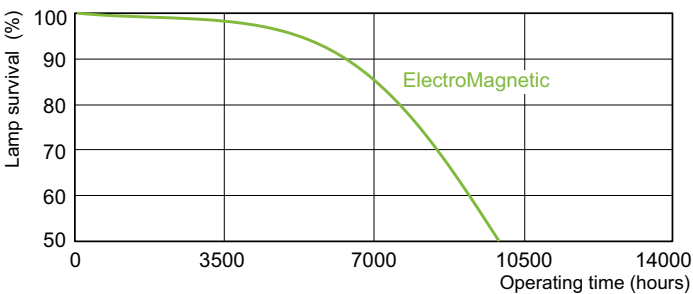


Life Expectancy 3 h cycle

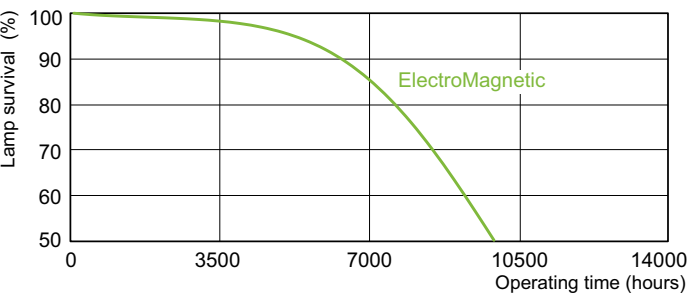

Life Expectancy 12 h cycle

PL-C Cluster 2-Pin Base

Lifetime

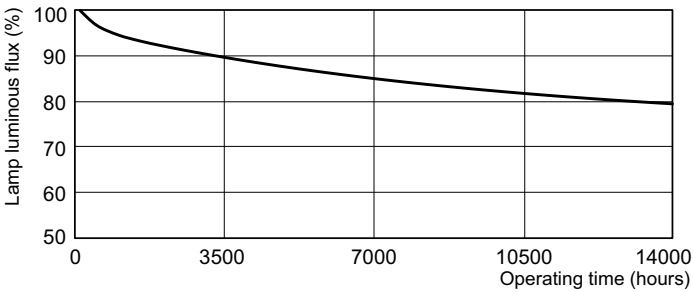

Lumen Maintenance 3h + 12 h cycle

