


PART NUMBER	SIZE	"R"	"O"	"H"	"S" MIN	"B" MIN	"L"
5233823	$\frac{1}{2}$ "	4"	4"	4"	1 $\frac{1}{2}$ "	1 $\frac{1}{16}$ "	6 $\frac{1}{4}$ "
5233824	$\frac{3}{4}$ "	4 $\frac{1}{2}$ "	4 $\frac{1}{2}$ "	4 $\frac{1}{2}$ "	1 $\frac{1}{2}$ "	$\frac{3}{4}$ "	7 $\frac{1}{8}$ "
5233825	1"	5 $\frac{3}{4}$ "	5 $\frac{3}{4}$ "	5 $\frac{3}{4}$ "	1 $\frac{7}{8}$ "	$\frac{7}{8}$ "	9"
5233826	1 $\frac{1}{4}$ "	7 $\frac{1}{4}$ "	7 $\frac{1}{4}$ "	7 $\frac{1}{4}$ "	2"	1"	11 $\frac{3}{8}$ "
5233827	1 $\frac{1}{2}$ "	8 $\frac{1}{4}$ "	8 $\frac{1}{4}$ "	8 $\frac{1}{4}$ "	2"	1 $\frac{1}{8}$ "	13"
5233828	2"	9 $\frac{1}{2}$ "	9 $\frac{1}{2}$ "	9 $\frac{1}{2}$ "	2"	1 $\frac{1}{4}$ "	15"
5233829	2 $\frac{1}{2}$ "	10 $\frac{1}{2}$ "	10 $\frac{1}{2}$ "	10 $\frac{1}{2}$ "	3"	1 $\frac{1}{2}$ "	16 $\frac{1}{2}$ "
5233830	3"	13"	13"	13"	3 $\frac{1}{8}$ "	1 $\frac{5}{8}$ "	20 $\frac{3}{8}$ "
5233831	3 $\frac{1}{2}$ "	15"	15"	15"	3 $\frac{1}{4}$ "	1 $\frac{11}{16}$ "	23 $\frac{1}{2}$ "
5233832	4"	16"	16"	16"	3 $\frac{3}{8}$ "	1 $\frac{3}{4}$ "	25 $\frac{1}{8}$ "
5233835	5"	24"	24"	24"	3 $\frac{5}{8}$ "	2"	37 $\frac{5}{8}$ "
5233834	6"	30"	30"	30"	3 $\frac{3}{4}$ "	2 $\frac{1}{8}$ "	47 $\frac{1}{8}$ "



ETL LISTED
 CONFORMS TO UL651
 ETL CONTROL #3107144
 CONFORMS TO NEMA TC3
 SEE NEC ARTICLE 352 FOR USE
 MATERIAL IS RIGID PVC
 BEND TOLERANCE IS $\pm 2^\circ$

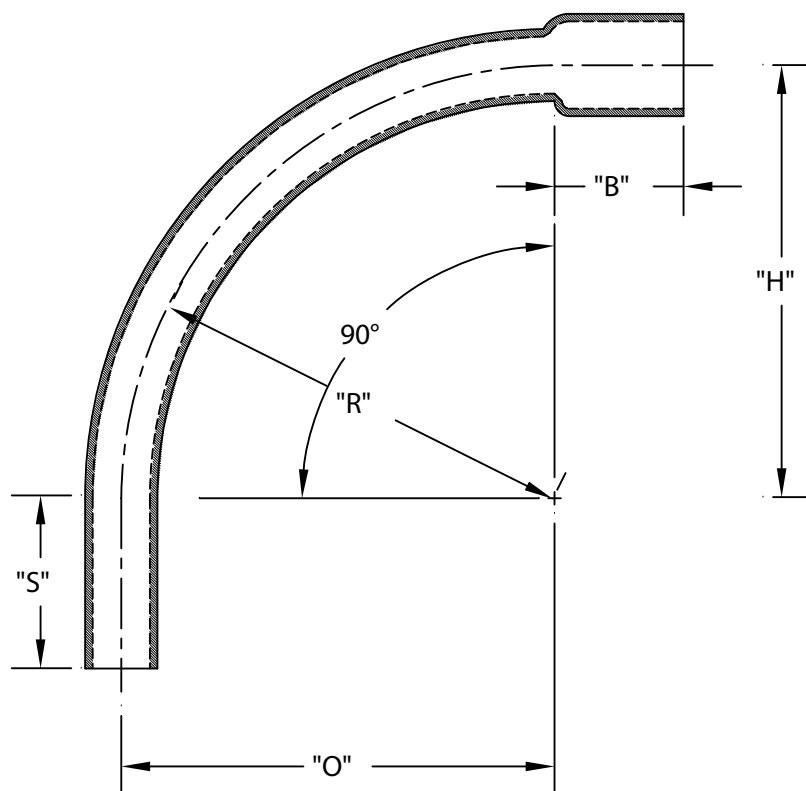

CANTEX
 INC.
 Fort Worth, TEXAS

90° Elbows Bell End
 Schedule 40 Standard Radius Elbows

Drawn By: CD Branch

Date: 10/15/07

Ref.