




Topaz Specification Sheet

Description: Rigid Conduit Bodies with Cover and Gasket - Rigid C Type

Standard Material: Aluminum Die Cast Copper Free
Cover stamped steel
Gasket - Neoprene Rubber

Features: Tapered threaded hubs - NPT
Suitable for use in concrete.
Wet Location

Application: To provide access to conductors for pulling, slicing
and maintenance

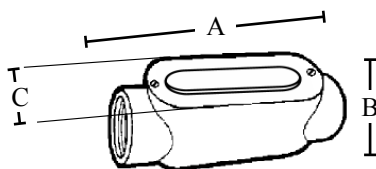

TOPAZ CAT #	A	B	C	Max No. Conductors
C1CG	4.720	1.370	1.330	1 #6AWG
C2CG	5.570	1.625	1.540	2 #6AWG
C3CG	6.460	1.900	1.740	3 #6AWG
C4CG	8.528	2.770	2.490	3 #2AWG
C5CG	8.528	2.770	2.490	3 #2AWG
C6CG	10.831	3.335	3.100	3 #2/0AWG
C7CG	13.500	4.060	4.450	3 #4/0AWG
C8CG	13.500	4.685	4.450	3 #250MCM
C9CG	15.937	5.450	5.500	3 #350MCM
C10CG	15.937	5.450	5.500	4 #350MCM

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
C1CG	19901	1/2"	10	100	30
C2CG	19911	3/4"	10	50	25
C3CG	19921	1"	5	25	18
C4CG	19931	1 1/4"	2	10	17
C5CG	19941	1 1/2"	2	10	19
C6CG	19951	2"	1	5	14
C7CG	19961	2 1/2"	—	1	7
C8CG	19971	3"	—	1	7
C9CG	19981	3 1/2"	—	1	10
C10CG	19991	4"	—	1	10

Approved by Quality Control: John Cavalieri



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488