



PL-C Cluster 4-Pin Base

PL-C 26W/841/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

General Information		Operating and Electrical	
Cap-Base	G24Q-3 [G24q-3]	Power (Rated) (Nom)	26.0 W
Life to 50% Failures Preheat (Nom)	13000 h	Lamp Current (Nom)	0.335 A
LSF Preheat 2000 h Rated	99 %	Temperature	
LSF Preheat 4000 h Rated	98 %	Design Temperature (Nom)	28 °C
LSF Preheat 6000 h Rated	97 %	Controls and Dimming	
LSF Preheat 8000 h Rated	90 %	Dimmable	Yes
Light Technical		Mechanical and Housing	
Color Code	841 [CCT of 4100K]	Cap-Base Information	4P
Initial lumen (Nom)	1800 lm	Approval and Application	
Luminous Flux (Rated) (Nom)	1800 lm	Energy Efficiency Label (EEL)	A
Color Designation	Cool White (CW)	Mercury (Hg) Content (Nom)	1.4 mg
Correlated Color Temperature (Nom)	4100 K	Energy Consumption kWh/1000 h	29 kWh
Luminous Efficacy (rated) (Nom)	67 lm/W	Product Data	
Color Rendering Index (Nom)	82	Order product name	PL-C 26W/41/4P/ALTO 10PK
LLMF 2000 h Rated	92 %	EAN/UPC - Product	046677111779
LLMF 4000 h Rated	87 %	Order code	383372
LLMF 6000 h Rated	83 %		
LLMF 8000 h Rated	81 %		

PL-C Cluster 4-Pin Base


Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927907384030
Net Weight (Piece)	60.400 g

ILCOS Code	FSQ-26/40/1B-E-G24q=3
------------	-----------------------

Warnings and Safety

- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 26W/41/4P/ALTO 10PK	27.1 mm	27.1 mm	130.5 mm	149.0 mm	163.9 mm

PL-C 26W/840/4P

Photometric data

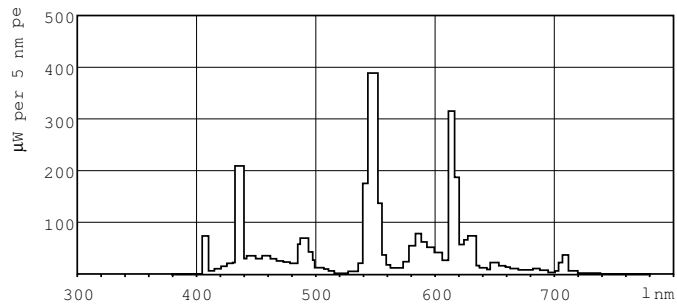



Lightcolor /840

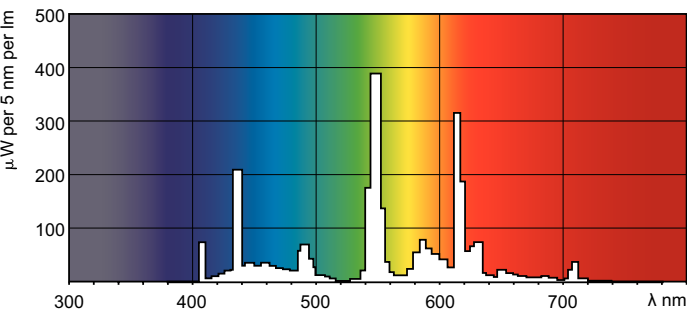


Lightcolor /840

PL-C Cluster 4-Pin Base

Lifetime

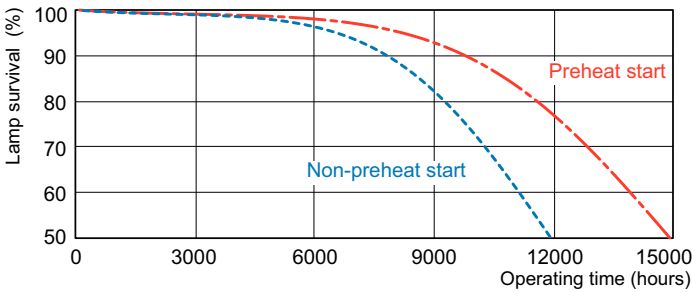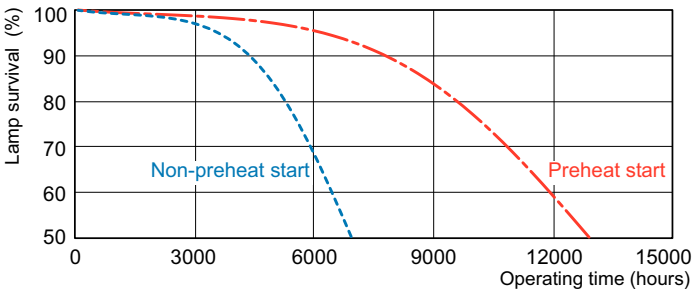

Life Expectancy 3 h cycle

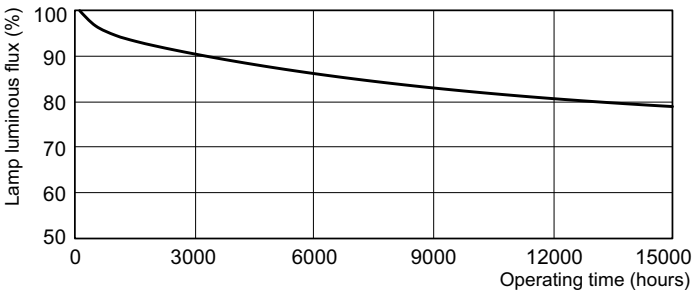

Life Expectancy 12 h cycle

Lumen Maintenance 3 h and 12 h cycle

