


18/2 PLENUM RATED, UNSHIELDED FIRE ALARM CABLE

ADI PRO

18 AWG 2 SOLID CONDUCTORS

Ratings FPLP, CL3P, FT6
Approvals ETL Listed

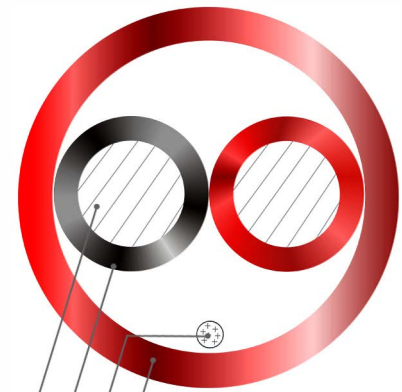

Center Conductor
Insulation
Rip cord
Jacket

Construction

Conductor 18 AWG Solid Bare Copper
Conductor Count 2
Insulation Plenum PVC(0.007" nom.)
Insulation Colors Black, Red
Lay Length 2.25" nom.
Shielding N/A
Rip Cord Yes
Jacket Plenum PVC(0.015"nom.)
Overall Diameter 0.136" nom.

Print Legend ADI PRO P/N RN-200XXXX
OXYGEN FREE 2C18 3180662 (ETL)US
FPLP 75C ROHS CL3P FT6 LOT#XXXX
MMDDYY XXXXFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 6.52 Ohms/1000'at 20°C
Capacitance 25.6 pF/ft.nom.
Temperature Wire maintains flexibility
between -20°C/-4°F to
75°C/167°F. Exposure
below 0°C/32°F may
cause PVC jacket to be
brittle or crack if impacted
or bent.

Flame Rating NFPA 262(Plenum);
CSA C22.2 No. 2556 (FT6)
RoHS Compliant Yes
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2005106	Red	1000Ft.	Express Box
RN-2005506	Red	500Ft.	Express Box



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands