

# 22/4 RISER RATED, UNSHIELDED FIRE ALARM CABLE




## 22 AWG 4 SOLID CONDUCTORS

Ratings FPLR, CL3R, FT4  
Approvals ETL Listed

### Construction

Conductor 22 AWG Solid Bare Copper  
 Conductor Count 4  
 Insulation Riser PVC (0.011" nom.)  
 Insulation Colors Black, Red, Green, Yellow  
 Lay Length Straight  
 Shielding N/A  
 Rip Cord Yes  
 Jacket PVC (0.016" nom.)  
 Overall Diameter 0.123" nom.  
 Print Legend ADI PRO P/N RN-2012506  
 OXYGEN FREE 4C22 3180662 (ETL)US  
 FPLR 75C ROHS CL3R FT4 LOT#XXXX  
 MMDDYY XXXXFT

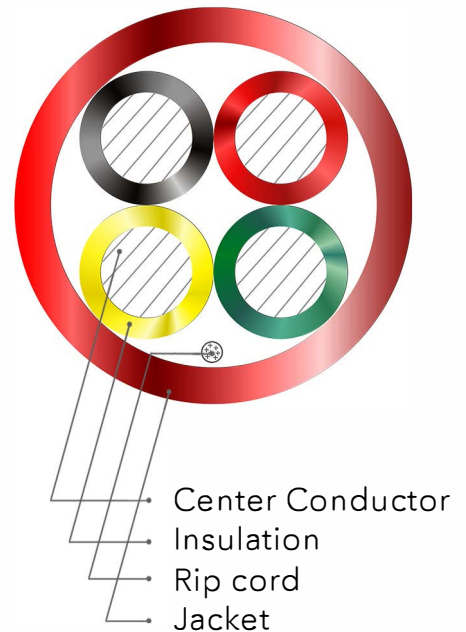

### Properties

Operating Voltage 300 Volts max.  
 DC Resistance 18 Ohms/1000'at 20°C  
 Capacitance 18.2 pF/ft.nom.  
 Temperature Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.

Flame Rating UL1666(Riser);  
 CSA C22.2 No. 2556 (FT4)  
 RoHS Compliant Yes  
 Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2012506	RED	500FT	SPEED COIL



For more information contact  
 your ADI Sales person or visit  
[adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)