

16/2 RISER RATED, UNSHIELDED SECURITY & CONTROL CABLE




16 AWG 2 Stranded Conductors

Ratings CMR, CL3R, FT4
Approvals ETL Listed

Construction

Conductor 16 AWG 19 Strand Bare Copper
Conductor Count 2
Insulation PVC (0.011" nom.)
Insulation Colors Black, Red
Lay Length 4" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.016" nom.)
Overall Diameter 0.168" nom.

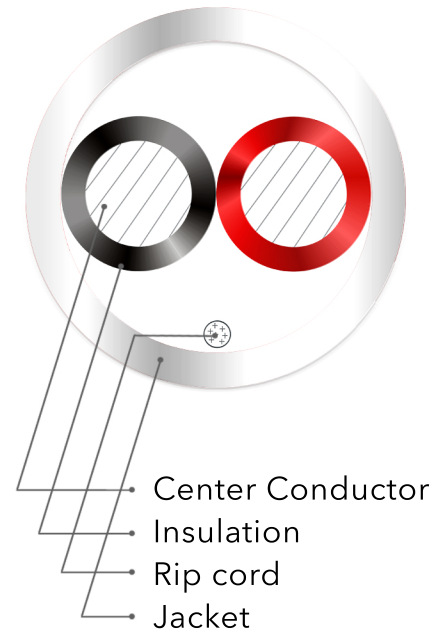

Print Legend ADI PRO P/N RN-XXXXX OXYGEN
FREE 2C16 3180662 C(ETL)US CL3R 75C, CMR FT4
RoHS LOT#XXXX MMDDYY XXXFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 4.19 Ohms/1000' at 20°C
Capacitance 23.2 pF/ft. nom.
Temperature -20°C to 60°C
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-82SR501	WHITE	500FT	EXPRESS BOX



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands