

# 18/2 PLENUM RATED, SHIELDED SECURITY & CONTROL CABLE




## 18 AWG 2 Stranded Conductors, Shielded

Ratings CMP, CL3P, FT6  
Approvals ETL Listed

### Construction

Conductor 18 AWG 19 Strand Bare Copper  
Conductor Count 2  
Insulation Plenum PVC (0.007" nom.)  
Insulation Colors Black, Red  
Lay Length 2.32" nom.  
Shielding Aluminum Foil/Mylar w/24 AWG Tinned-Copper Drain  
Rip Cord Yes  
Jacket Plenum PVC (0.015" nom.)  
Overall Diameter 0.156" nom.

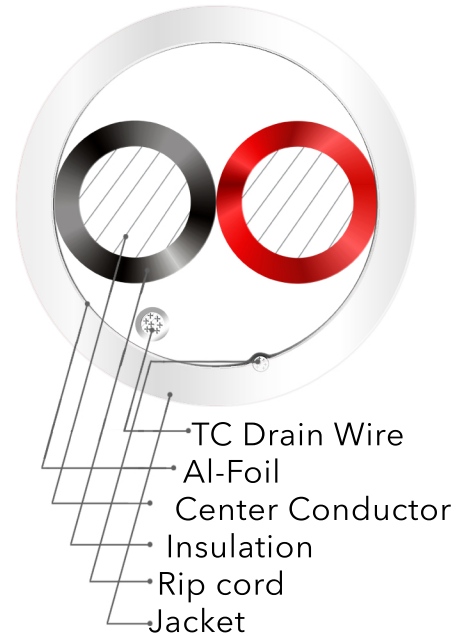

Print Legend ADI PRO P/N RN-XXXXXXX OXYGEN  
FREE 2C18 SHIELDED 3180662 C(ETL)US CL3P 75C,  
CMP FT6 RoHS LOT#XXXX MMDDYY XXXXFT

### Properties

Operating Voltage 300 Volts max.  
DC Resistance 6.66 Ohms/1000' at 20°C  
Capacitance 59.3 pF/ft. nom.  
Temperature -20°C to 75°C  
Flame Rating NFPA 262 (Plenum);  
CSA C22.2 No. 2556 (FT6)  
RoHS Compliant Yes  
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-92SP101	OFF WHITE	1000FT	EXPRESS BOX



For more information contact your ADI Sales person or visit [adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)