




Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 888-368-7233
 fax: 800-259-8368
 www.BuilderBest.com

DRYER OUTLET BOX




PRODUCT SPECIFICATIONS

- One Self trimming unit:
18" wide by 24" high
- Fits all 16" centers 2x4's and 2x6's;
- Six prescored, true 4" diameter knockouts in most common positions
- 6 starburst knockouts for gas connections and venting
- 6 pre-drilled mounting holes
- Plastic meets UL® standard 94 HB tests for flammability

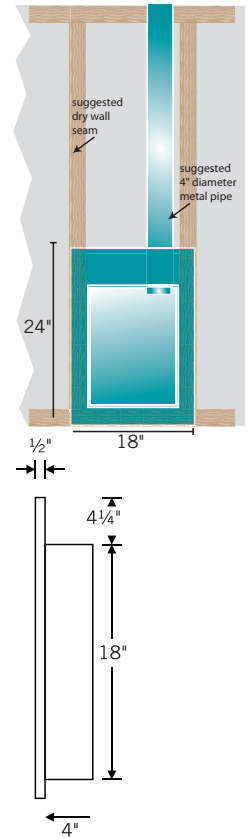

PART NUMBERS

Description	Part #	Qty	Package
Single Box	110697	10	Bulk
	110698	3	Ind. Box
	110696	3	Display Box
Box with round to oval adapter/fitting:			
	111563	3	Display Box
Description	Part #	Qty	
Kit for 8' wall	111000	5	Ind. Box
Kit for 10' wall	111001	5	Ind. Box

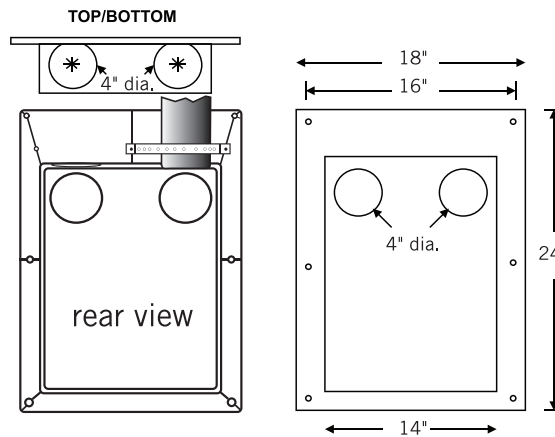

DISPLAY SAMPLE

- Box with adhesive label



KIT INCLUDES

- Periscope for 8' wall or 10' wall

RECOMMENDATIONS

- Proper maximum operating temperature of a dryer is approximately 180°
- The UL2158B tests at 200°. Melting point is 350-380°



LABELS



Made in the U.S.A.

WARRANTY

Manufacturer assumes no responsibility for failure due to improper installation. All specifications and designs are subject to change without notice and without incurring liability.

WARRANTY EXCLUSION AND DISCLAIMER Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice.

Dryer Outlet Box V3 09/04/15