



HOW TO INSTALL SYSTEM

Each component in the *Freeze Free* system includes complete and well-illustrated instructions. Follow these instructions closely when installing the system. Remember to use only EasyHeat *Freeze Free* components. *You may wish to consult your local electrical code.*


Step One

The first step is to prepare the cable for installation. EasyHeat's special *Freeze Free* end seal must be installed to protect the end of the cable.




Step Two

Following instructions carefully, assemble cable into plug kit.

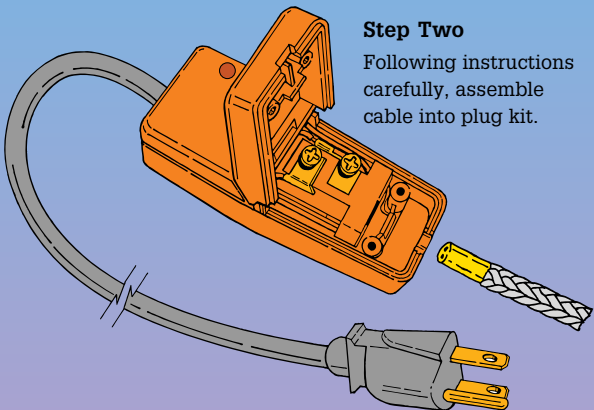

Step Three

Apply the cable to the pipe. If a spiral is required, the distance between the spirals will ensure that the pipe has the appropriate coverage. See Chart 1 or 2 inside.




Step Four

Secure the cable to the pipe using the *Freeze Free* HCA tape or a high quality electricians tape.



Step Five

Wrap the entire pipe and cable with insulation. Complete the installation with the weatherproof wrap and the caution signs.



EASYHEAT®

Warming Your World

USA

2 Connecticut South Drive
East Granby CT 06026
TEL 800/537-4732
FAX 800/541-7451

Canada

99 Union Street
Elmira ON N3B 3L7
TEL 800/794-3766
FAX 519/669-6419

EASYHEAT®
Warming Your World

FREEZE®

free

Self Regulating
Pipe Heating System

For 120 VAC

PRODUCT SELECTION GUIDE

CABLE (maximum cable length: 75 feet per application)

2102	100 feet of Freeze Free cable
2302	300 feet of Freeze Free cable
2502	500 feet of Freeze Free cable

ACCESSORIES

10802	Connection Kit (plug & end seal), clamshell individual or 10-pack tray
10803	Connection Kit, polybagged 25 count
HCA	30 feet of application/caution tape
EH38	Thermostat for automatic operation


KITS

10805	Includes 5' of cable with plug and end seal
10815	Includes 15' of cable with plug and end seal

EasyHeat products are provided with a limited warranty: see owner's manual or contact EasyHeat for complete terms and conditions.

Stop Pipe Freeze-up

- Grounded 30" cord-set requires less heating cable
- Power indicator light
- Built-in, fast-reaction fuse
- Easy to install

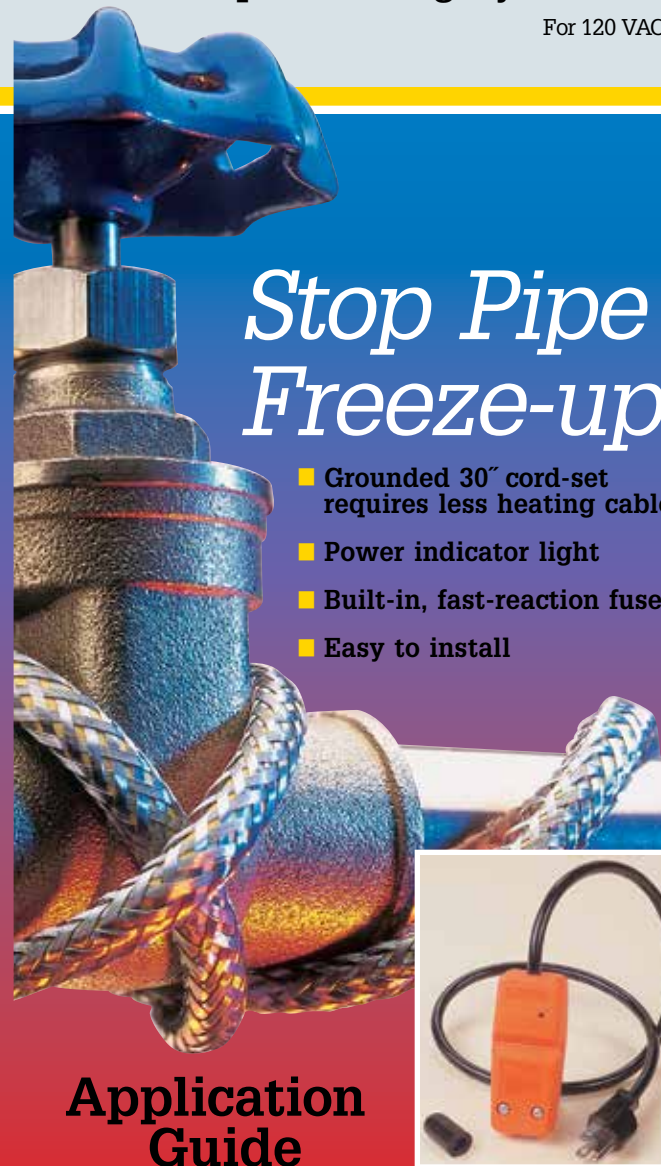

Application Guide



952S Mobile Home
Pipe Heating Cable



11001-092 Rev. 7 ©2015 EasyHeat

Stop Pipe Freeze-up

WITH A FREEZE FREE PIPE HEATING SYSTEM

EasyHeat, the leader in residential pipe freeze protection, presents the *Freeze Free* pipe heating system. Using self-regulating technology, this cable actually produces only the heat that is needed, where and when it is needed, to prevent pipe freeze-up. This system, cULus Listed, can be installed with confidence and with the assurance that it will operate for years without requiring service.

A *Freeze Free* system is easy to install and includes all the materials needed for a safe and proper installation. This product is suitable for use on plastic and metal water pipes. Use the *Freeze Free* system to make sure your pipes don't freeze.

COLLECT THE FOLLOWING NECESSARY INFORMATION:

- Pipe Size
 - outside diameter 1½" pipe
 - length 12 feet
- Lowest expected air temperature -20°F (disregard windchill, it has been figured into the length selection chart)
- Number of valves and spigots 1 ball valve
- Distance from pipe to electrical outlet 2 feet

EXAMPLE

Freeze Free plugs come with a 30" cord-set to bridge the gap between the pipe and the electrical outlet.


REFER TO THE LENGTH SELECTION CHARTS

These charts will tell you the length of the cable you need per foot of pipe and also the recommended distance to leave between each spiral wrap of cable on the pipe.

HOW TO USE THE LENGTH SELECTION CHART

Choose either Chart #1 or Chart #2 for your type of pipe (plastic or metal). Read down to find your pipe diameter, then read across to the box below your lowest expected temperature. The first number appearing in the box will tell you the length (feet) of cable you need per foot of pipe. The second number indicates the recommended distance between each spiral wrap of cable on the pipe. The abbreviation "str" indicates that the cable should be run in a straight line instead of spiral wrap.

Cable Lngth. Req. per ft. of pipe	Distance betw. spiral wraps
---	--------------------------------

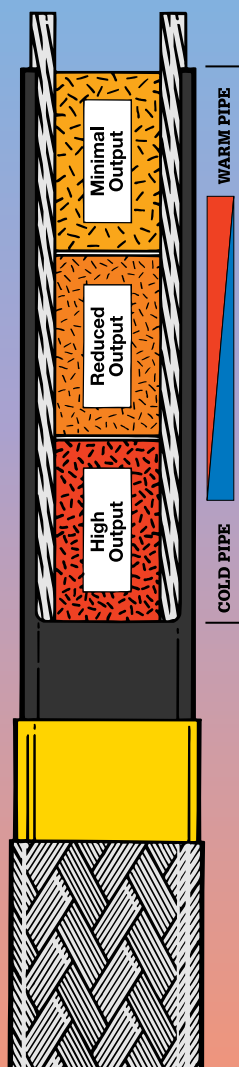

HOW IT WORKS

A special self-regulating core is at the center of the *Freeze Free* cable. This core is conductive and adjusts according to the surrounding temperatures. When it is cold, the cable's core has many conductive paths that generate enough heat to keep the water flowing in the pipe. As the surrounding temperature warms, there are fewer conductive paths and less heat is generated. This self-regulating technology ensures the right amount of heat when and where it is needed.

Chart #1: Length Selection for Plastic Pipes
(based on the use of 1/2" insulation)

Pipe Dia.	Lowest Expected Temperature				
	+20°F	0°F	-20°F	-40°F	-60°F
1/2"	1' str.	1' str.	1.5' 2 3/8"	2' 1 1/2"	2.4' 1 1/4"
3/4"	1' str.	1.1' 7 1/4"	1.7' 2 3/8"	2.3' 1 5/8"	2.9' 1 1/4"
1"	1' str.	1.3' 5"	2' 2 3/8"	2.7' 1 5/8"	3.3' 1 3/8"
1 1/4"	1' str.	1.6' 4 1/4"	2.3' 2 1/2"	3.2' 1 3/4"	4.1' 1 3/8"
1 1/2"	1' str.	1.8' 4"	2.5' 2 5/8"	3.6' 1 3/4"	4.7' 1 3/8"
2"	1' str.	2.1' 4"	3' 2 5/8"	4.3' 1 3/4"	5.4' 1 1/8"

Chart #2: Length Selection for Metal Pipes
(based on the use of 1/2" insulation)

Pipe Dia.	Lowest Expected Temperature				
	+20°F	0°F	-20°F	-40°F	-60°F
1/2"	1' str.	1' str.	1' str.	1.3' 3 1/8"	1.7' 2"
3/4"	1' str.	1' str.	1.1' 7 1/4"	1.5' 3"	2' 2"
1"	1' str.	1' str.	1.3' 5"	1.8' 2 3/4"	2.4' 1 7/8"
1 1/4"	1' str.	1.1' 11 1/2"	1.6' 4 1/4"	2.1' 2 7/8"	2.9' 1 7/8"
1 1/2"	1' str.	1.2' 9"	1.8' 4"	2.4' 2 3/4"	3.2' 1 7/8"
2"	1' str.	1.5' 6 5/8"	2.2' 3 3/4"	2.8' 2 7/8"	3.9' 2"

CALCULATE THE EXACT HEATER LENGTH YOU NEED

- Multiply the cable length required per foot of pipe by the length of your pipe. Add one extra foot for each valve located in your line. Maximum cable length is 75 feet.

$$\begin{aligned}
 &\text{Cable length required per foot of pipe} \times \text{pipe length} \\
 &+ \text{one foot for each valve or spigot} \\
 &= \text{total cable length}
 \end{aligned}$$

EXAMPLE

- Your pipe diameter is 1½"
- Your lowest expected temperature is -20°F
- Your pipe length is 12 feet

From Chart #1:

- You need 2.5 feet of cable per foot of pipe for plastic pipes

From Chart #2:

- You need 1.8 feet of cable per foot of pipe for metal pipes

EXAMPLE

You Have: 12 feet of plastic pipe length
one ball valve

You Need: 2.5 feet of cable per foot of plastic pipe

Calculate: (12 feet x 2.5) + 1 foot for ball valve
Total cable length = 31 feet

EASYHEAT®
Warming Your World

FREEZE®
Self Regulating
Pipe Heating System