

Conduit Clamps

For Rigid Conduit, IMC & EMT

Type J

Use:

For securing Rigid Conduit, IMC, EMT and Flexible Metal Conduit.

Material:

Malleable Iron

Steel Bolt

Finish:

Mechanically Galvanized




Third Party Certification:



CSA Certified: 009795

Applicable Third Party Standards:

CSA Standard: C22.2 No. 18



Type J

Trade Size (inches)	Catalog Number	Dimensions in Inches				Bolt Size
		A	B	C	D	
1/2	J-50G	2 9/16	1 1/16	1 3/8	1 5/8	5/16-18 x 1 1/2
3/4	J-75G	2 7/8	1 1/8	1 13/32	1 15/16	5/16-18 x 1 1/2
1	J-100G	3 1/2	2 9/16	1 3/4	2 1/4	5/16-18 x 1 1/2
1 1/4	J-125G	3 3/4	2 1/2	1 3/4	2 9/16	5/8-16 x 1 1/2
1 1/2	J-150G	4 3/16	2 7/8	2	2 13/16	5/8-16 x 1 1/2
2	J-200G	5	3 5/16	2 1/16	3 1/16	1/2-13 x 1 3/4
2 1/2-3	J-2530G	6 5/16	4 7/16	2 3/8	4 9/16	5/8-11 x 2 1/2
3 1/2-4	J-3540G	7 7/8	5 1/16	3 3/4	5 3/4	5/8-11 x 2 1/2

Type CBC

Conduit C Clamp

Use:

For securing Rigid Conduit, IMC and EMT.
Swivel grip rotates a full 360°.

Material/Finish:

Malleable Iron/Zinc Plated

Steel square head screw

Optional Finish:

Mechanically Galvanized


Contact your local representative for pricing,
availability and minimum order quantities.

Note:

1 CBC-1— maximum beam thickness of 1/4" when
using 1 1/4" conduit.

2 CBC-2— maximum beam thickness of 3/8" when
using 2" conduit.

Trade Size (inches)	Catalog Number	Dimensions in Inches	
		Length	Width
1/2 - 3/4 - 1 - 1 1/4	CBC-1	3 3/8	2 1/16
1 1/4 - 1 1/2 - 2	CBC-2	4 7/8	3 3/4

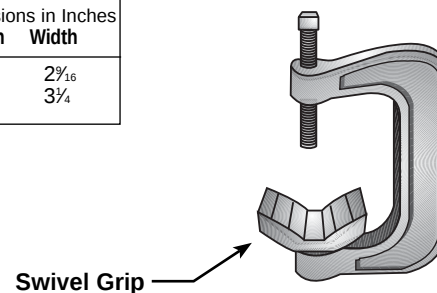

Type CBC