




M-9936 2

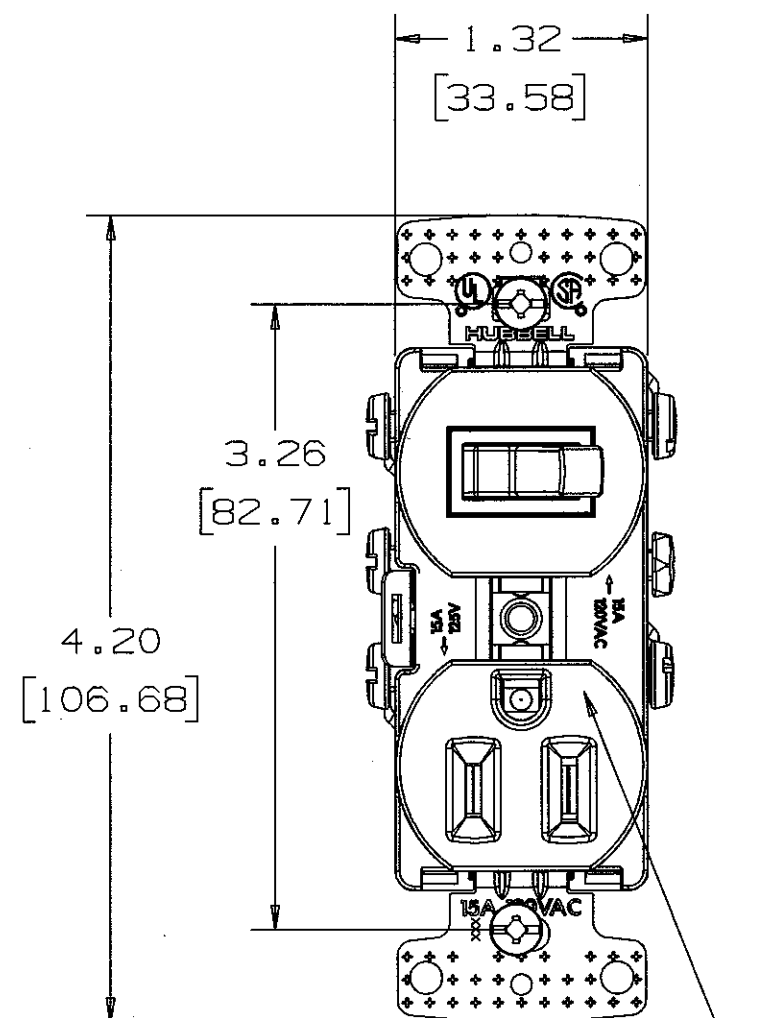

TAMPER RESISTANT
VERSION MARKED "TR"

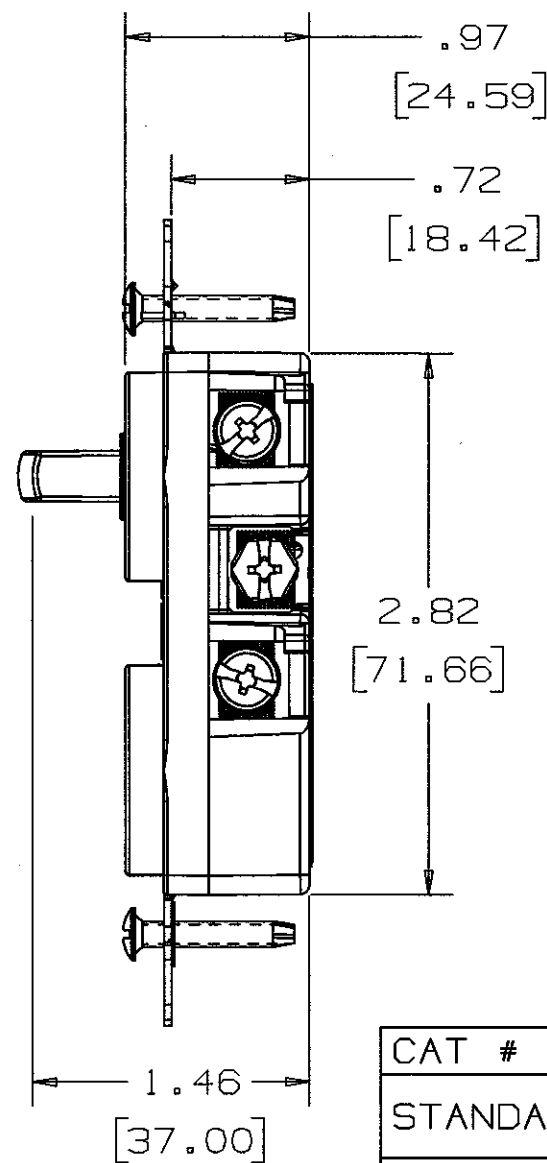

DIMENSIONS ARE IN INCHES [MM].

RECEPTACLE CONFIG. AND RATING	SWITCH RATING
NEMA 5-15R 	15A 120VAC

CAT #		COLOR	STYLE
STANDARD	TAMPER RESISTANT		
RC108	RC108TR	BROWN	SINGLE POLE SWITCH W/RECEPT
RC108I	RC108ITR	IVORY	
RC108W	RC108WTR	WHITE	
RC108GY	-	GRAY	
RC108BK	-	BLACK	
RC108AL	RC108ALTR	ALMOND	3-WAY SWITCH W/RECEPT
RC108LA	RC108LATR	LIGHT ALMOND	
RC308	RC308TR	BROWN	
RC308I	RC308ITR	IVORY	
RC308W	RC308WTR	WHITE	
RC308GY	-	GRAY	
RC308BK	-	BLACK	
RC308AL	RC308ALTR	ALMOND	
RC308LA	RC308LATR	LIGHT ALMOND	

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
SWITCH CONTACTS	SILVER	
BRIDGE	STEEL	ZINC
BASE	PLASTIC	
COVER	PLASTIC	
TOGGLE	PLASTIC	
CENTER FASTENER	STEEL	ZINC
TERMINAL	BRASS	
GROUNDING SPRING	SS	
SPRING HOUSING	PLASTIC	
WASHERS	PLASTIC	
MOUNTING SCREW	STEEL	ZINC
SPRING	STEEL	
ROCKER CONTACT	BRASS	

2	ADDED TAMPER RESISTANT CAT NOS PER DCN 14434	RK	01/22/08
1	RELEASED TO PRODUCTION PER DCN 13485	FJ	10/6/06
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
15A COMBINATION TOGGLE
SWITCH/RECEPTACLE

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	± 1/64	DR. BY	MPF
DECIMALS	± .005	APP. BY	FJ
ANGLES	± 2°	TR. BY	
		SCALE	1/1
		CHK'D BY	FJ
		DATE	10/3/05