



UP967 & UP968 3/8"-3"

**Brass Swing Check Valve
For Potable Water
200 WOG
Threaded Bonnet
Brass Disc**



WQA tested and Certified against NSF/ANSI 372 for "lead free" compliance.

Dimensions				
Units	Size	A	A-1	B
Inches	3/8	1.82	-	1.35
mm		46	-	34
Inches	1/2	1.86	2.18	1.35
mm		47	55	34
Inches	3/4	2.11	2.85	1.53
mm		54	72	39
Inches	1	2.52	3.46	1.74
mm		64	88	44
Inches	1 1/4	2.72	3.7	1.99
mm		69	94	51
Inches	1 1/2	3.23	4.33	2.28
mm		82	110	58
Inches	2	3.70	5.12	2.48
mm		94	130	63
Inches	2 1/2	5.20	6.73	3.11
mm		132	171	79
Inches	3	5.83	7.48	3.81
mm		148	190	97

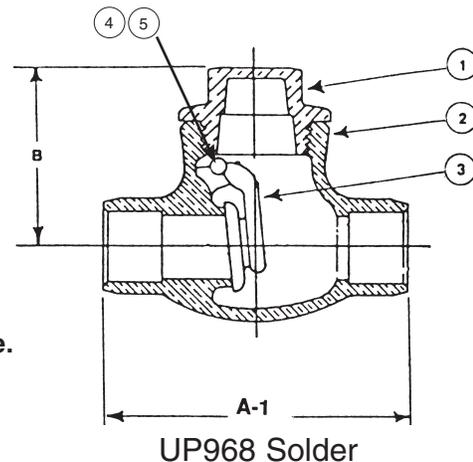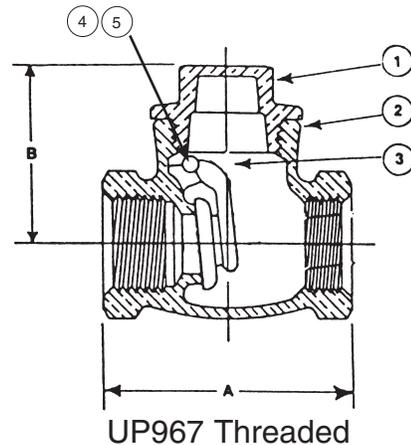

Warning: DO NOT USE for reciprocating air compressor service.

FEATURES

- BRASS BODY
- THREADED OR SOLDER ENDS
- THREADED BONNET
- INTEGRAL SEAT
- BRASS DISC
- 100% FACTORY TESTED
- INTERNATIONAL

MATERIAL SPECIFICATION			
1	CAP	FORGED BRASS	ASTM B283, C27450
2	BODY	FORGED BRASS	ASTM B283, C27450
3	DISC	FORGED BRASS	ASTM B283, C27450
4	SIDE PLUG	STAINLESS STEEL	ASTM A276, 304
5	PIN	STAINLESS STEEL	ASTM A276, 304

Milwaukee Valve Company
16550 W. Stratton Drive
New Berlin, WI 53151
Phone: 262-432-2700
Fax: 262-432-2701

Note: Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤ 0.25%. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the Technical/Service Information section on our website. For the most current information access www.milwaukeevalve.com

