



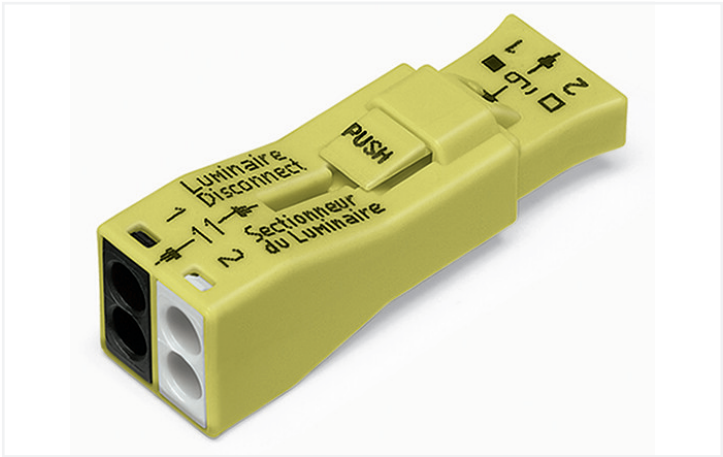

Color: yellow

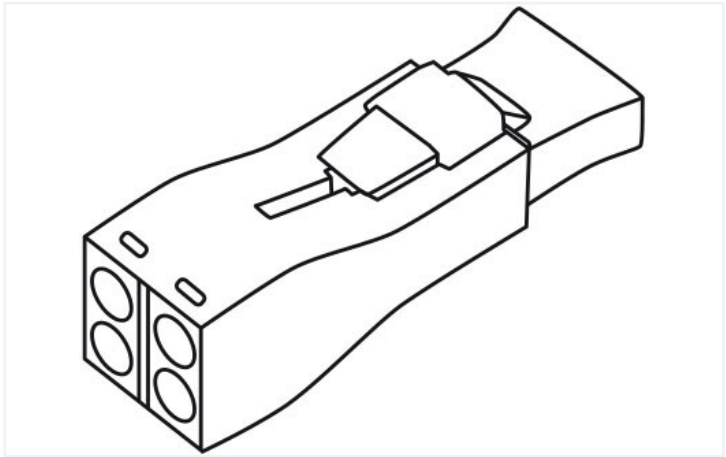

Electrical data

Ratings per IEC/EN	
Ratings per	EN 60998
Nominal voltage (U _N)	400 V
Rated surge voltage (U _s)	4 kV
Rated current	6 A

Ratings per IEC/EN 2	
Ratings per 2	EN 61984

Connection data

Connection points	6
Total number of potentials	2

Connection 1	
Connection type 1	Plug
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	16 ... 12 AWG
Pole number	2

Connection 2	
Connection type 2	Socket

Material Data

Note (material data)	
Information on material specifications can be found here	
Color	yellow
Fire load	0.103 MJ
Weight	4.8 g



Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	500 (40) pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966245332
Customs tariff number	85366990990

Approvals / Certificates		
General approvals		
		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NTR NL-7390
CCA DEKRA Certification B.V.	EN 61984	2178521.01
CCA DEKRA Certification B.V.	EN 60998	71-114174
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7391
CSA DEKRA Certification B.V.	C22.2 No. 182.3	1961671
UL UL International Germany GmbH	UL 2459	E313353

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 873-902	

Documentation			
Bid Text			
873-902	19.02.2019	xml 3.11 KB	
873-902	21.02.2019	docx 14.78 KB	

CAD/CAE-Data



CAD data	
2D/3D Models 873-902	

CAE data	
ZUKEN Portal 873-902	