

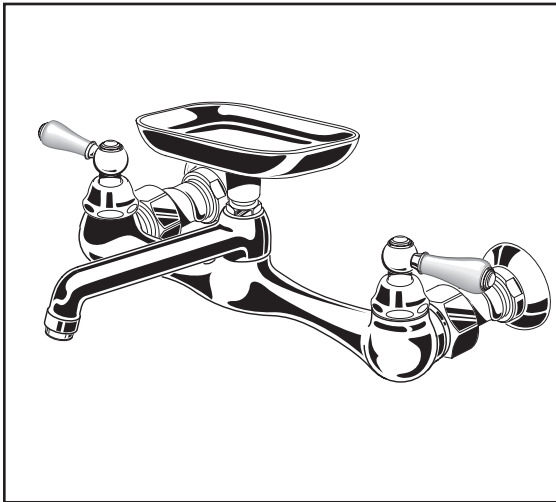
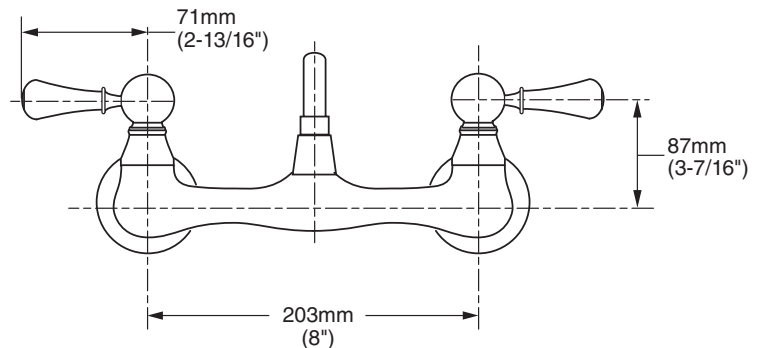
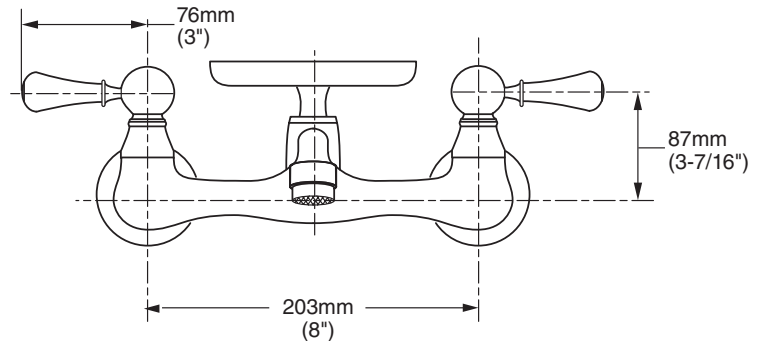


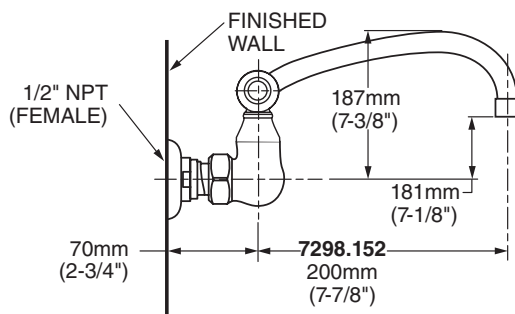

7295.252 Shown

MODEL NUMBER:

- ☐ **7295.252 Wall-Mount Sink Faucet**
5-5/8" cast swivel spout. Porcelain Lever Handles.
Soap Dish.
- ☐ **7295.252.F15 Wall-Mount Sink Faucet**
5-5/8" cast swivel spout. Porcelain Lever Handles.
Soap Dish.
- ☐ **7298.252 Wall-Mount Sink Faucet**
8" tubular swivel spout. Porcelain Lever Handles.
- ☐ **7298.252.F15 Wall-Mount Sink Faucet**
8" tubular swivel spout. Porcelain Lever Handles.

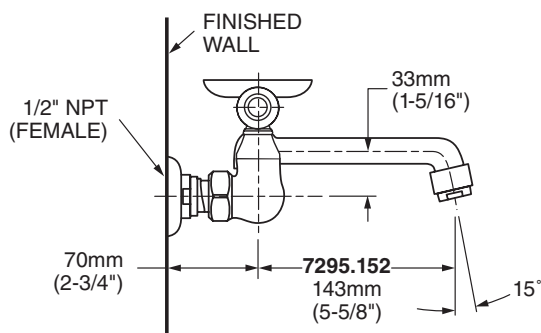

GENERAL DESCRIPTION:

Durable brass construction throughout. Amaris 1/4 turn washerless ceramic disc valve cartridges. One-half inch NPT female inlets with brass coupling nuts. 2.2 gpm/8.3 L/min. maximum flow rate, 1.5 gpm/5.7 L/min, maximum flow rate for F15 models. Brass swivel spout (360° rotation).

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.


SUGGESTED SPECIFICATION:

Wall-mount sink faucet shall be cast brass construction with all brass coupling nuts. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Models # 7295.252._____, 7298.252._____,


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
CSA B 125
NSF 61/Section 9 & Annex G

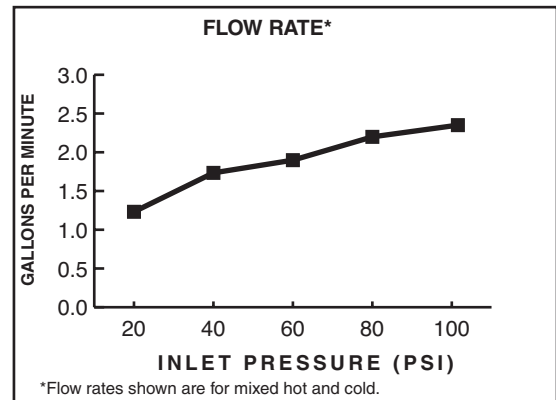

2.2 gpm/8.3 L/min. FLOW RATE

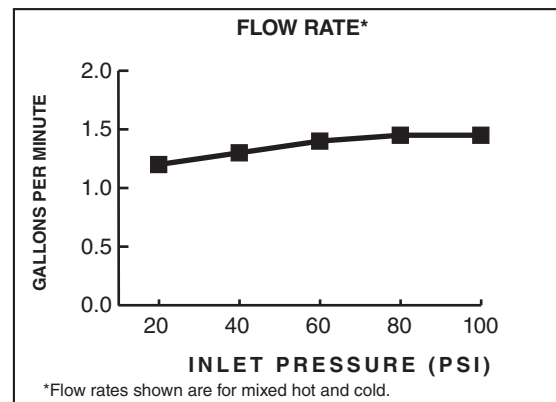

1.5 gpm/5.7 L/min. FLOW RATE

Product Number	Description	Finish
		Polished Chrome
		002
7295.252	Wall-Mount Sink Faucet. 5-5/8" Cast Swivel Spout. Soap dish - 2.2 gpm/8.3 L/min. maximum flow rate	
7295.252.F15	Wall-Mount Sink Faucet. 5-5/8" Cast Swivel Spout. Soap dish - 1.5 gpm/5.7 L/min. maximum flow rate	
7298.252	Wall-Mount Sink Faucet. 8" Tubular Swivel Spout. Less soap dish - 2.2 gpm/8.3 L/min. maximum flow rate	
7298.252.F15	Wall-Mount Sink Faucet. 8" Tubular Swivel Spout. Less soap dish - 1.5 gpm/5.7 L/min. maximum flow rate	



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.