Product Specifications



POWERED BY





CM-60T-B Chain Mount Base Kit, 16 ft chain

Dimensions

Mounting Diameter, maximum 1524.0 mm | 60 in Mounting Diameter, minimum 203.2 mm | 8 in Pipe Outer Diameter 60.3 mm | 2 3/8 in Height 152.4 mm | 6.0 in Length 203.2 mm | 8.0 in Mounting Circumference, maximum 4775.2 mm | 188.0 in Mounting Circumference, minimum 635.0 mm | 25.0 in Weight 28.5 kg | 62.8 lb Width 203.2 mm | 8.0 in

Environmental Specifications

Man Rating 250 lb vertical man load at 15 mph (BWS)

Wind Rating 120 mph (BWS) at 100 ft AGL

Wind Rating Criteria One 96 in x 10 in panel antenna per sector

Wind Rating Test Method TIA/EIA-222

General Specifications

Product Type Chain mount

Pipe, quantity 0

Chain Length 4.9 m | 16.0 ft

Chains, quantity 2

Includes Chains

Material Type Hot dip galvanized steel

Package Quantity 1 Sectors, quantity 3

Product Specifications




CM-60T-B





Outline Drawing

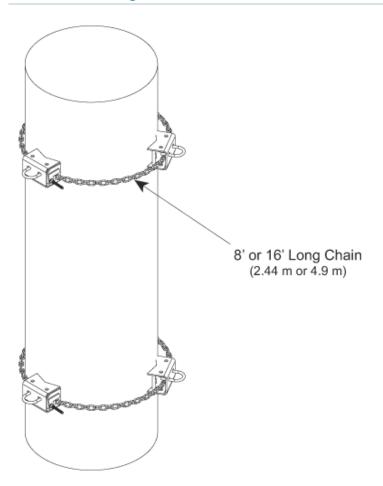

Regulatory Compliance/Certifications

Agency

Classification

ISO 9001:2008 Designed, manufactured and/or distributed under this quality management system

* Footnotes

Man Rating BWS—Base Wind Speed

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code