

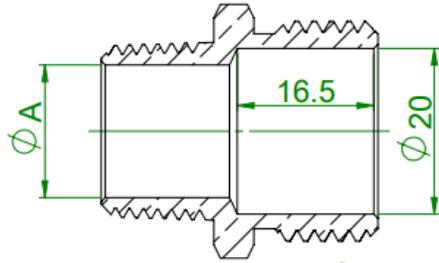


Features

- Available in a broad range of configurations
- Lead free product available

Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

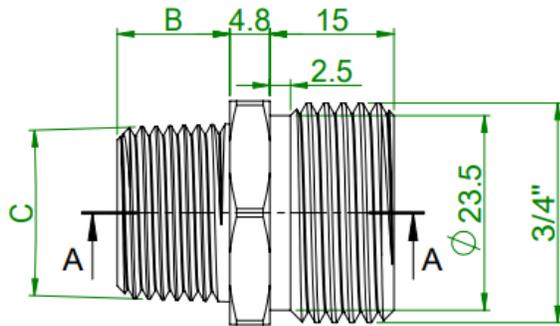

Dimensions

Part#	Size	A (mm)	B (mm)	C (in)
G30-3412	3/4" MH x 1/2" MIP	15.1	13.5	1/2"
G31-3434	3/4" MH x 3/4"	20	15	3/4"
G31-3434-NL	3/4" MH x 3/4"	20	15	3/4"
G32-3412-NL	3/4" MH x 1/2" MIP	15.1	13.5	1/2"

Features

- Available in a broad range of configurations
- Lead free product available




Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)



Dimensions

Part#	Size
G33-3434	3/4" MH x 3/4" MH (TAPPED 1/2" FIP)
G33-3434-NL	3/4" MH x 3/4" MH (TAPPED 1/2" FIP)


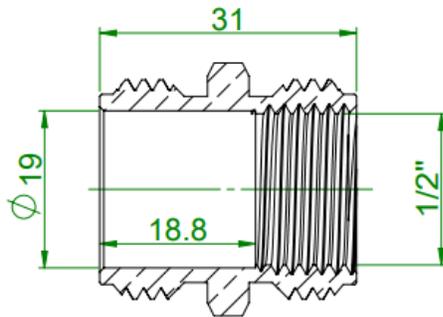
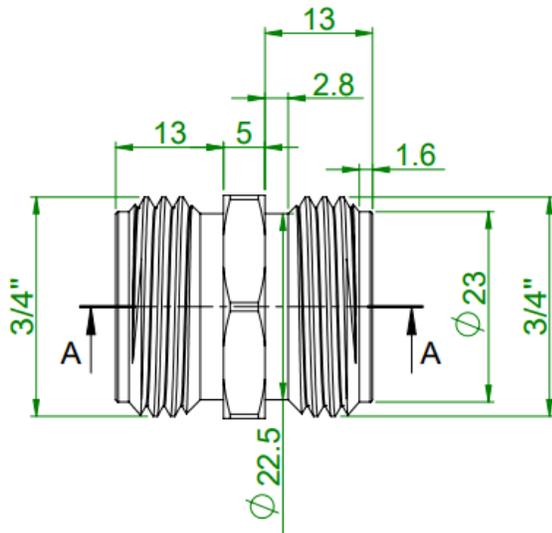


Features

- Available in a broad range of configurations
- Lead free product available

Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

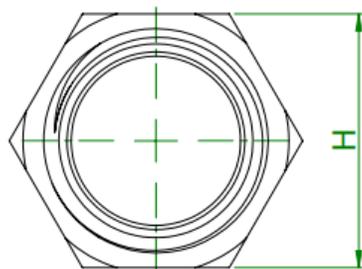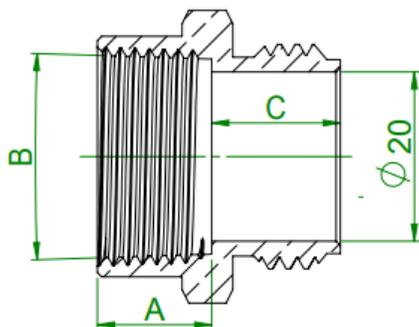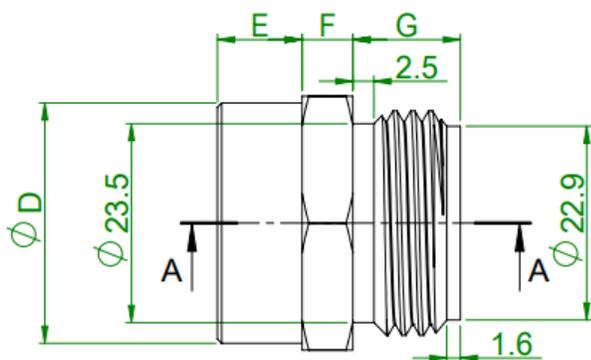

Dimensions

Part#	Size	A (mm)	B (in)	C (mm)	D (mm)
G34-3412	3/4" MH x 1/2" FIP	15	1/2"	18	24
G34-3412-NL	3/4" MH x 1/2" FIP	15	1/2"	18	24
G34-3434	3/4" MH x 3/4" FIP	13.5	3/4"	15	28.4
G34-3434-NL	3/4" MH x 3/4" FIP	13.5	3/4"	15	28.4

Part#	Size	E (mm)	F (mm)	G (mm)	H (mm)
G34-3412	3/4" MH x 1/2" FIP	13	5	15	27
G34-3412-NL	3/4" MH x 1/2" FIP	13	5	15	27
G34-3434	3/4" MH x 3/4" FIP	10	6	12.5	30
G34-3434-NL	3/4" MH x 3/4" FIP	10	6	12.5	30

Features

- Available in a broad range of configurations
- Lead free product available




Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)



Dimensions (mm)

Part#	Size	A (mm)	B (in)	C (mm)	D (mm)
G35-3412	3/4" FH x 1/2" MIP	15.1	1/2"	7	8
G35-3412-NL	3/4" FH x 1/2" MIP	15.1	1/2"	7	8
G35-3434	3/4" FH x 3/4" MIP	20	3/4"	5	10
G35-3434-NL	3/4" FH x 3/4" MIP	20	3/4"	5	10
G36-3412	3/4" FH x 1/2" MIP	15.98	1/2"	7	8
G37-3434	3/4" FH x 3/4" MIP	1/2"	3/4"	5	10

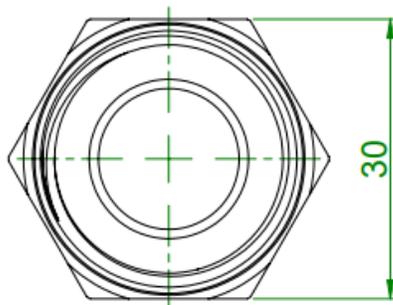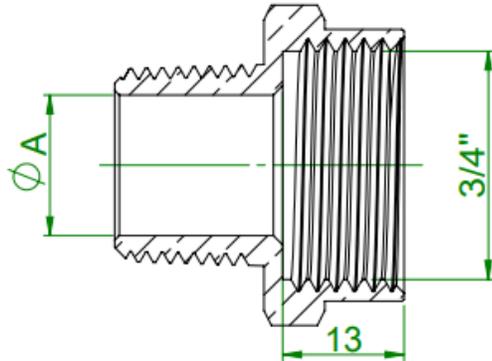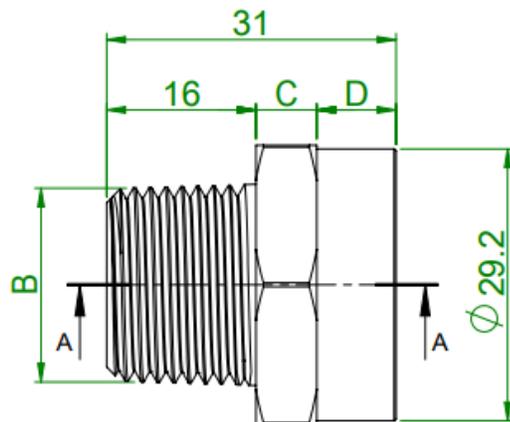


Features

- Available in a broad range of configurations
- Lead free product available

Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

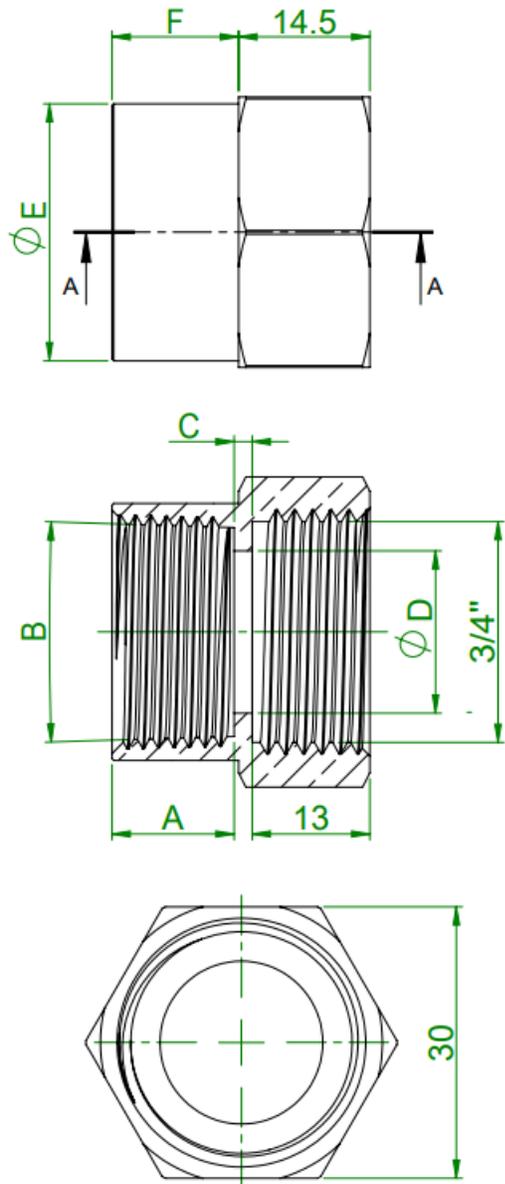

Dimensions

Part#	Size	A	B	C
G38-3412	3/4" FH x 1/2" FIP	14.2	1/2"	-
G38-3412-NL	3/4" FH x 1/2" FIP	14.2	1/2"	-
G38-3434	3/4" FH x 3/4" FIP	15.5	3/4"	2
G38-3434-NL	3/4" FH x 3/4" FIP	15.5	3/4"	2




Part#	Size	D	E	F
G38-3412	3/4" FH x 1/2" FIP	-	24	12.7
G38-3412-NL	3/4" FH x 1/2" FIP	-	24	12.7
G38-3434	3/4" FH x 3/4" FIP	18	28.5	14
G38-3434-NL	3/4" FH x 3/4" FIP	18	28.5	14

Features

- Available in a broad range of configurations
- Lead free product available

Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

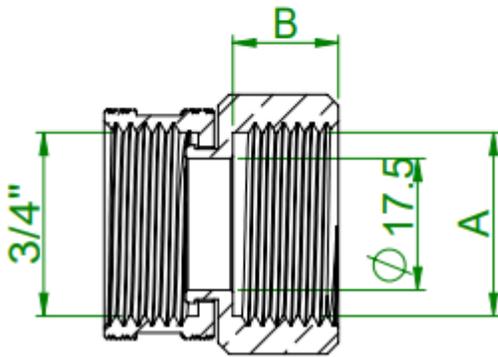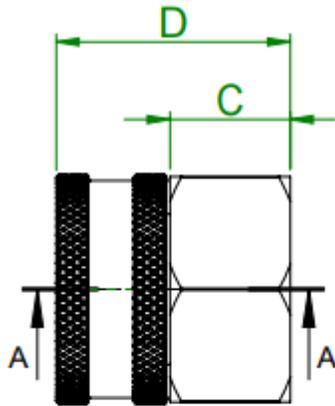

Dimensions

Part#	Size	A (in)	B (mm)	C (mm)
G38S-3412	3/4" FH x 1/2" FIP	1/2"	11.9	14
G38S-3412-NL	3/4" FH x 1/2" FIP	1/2"	11.9	14
G38S-3434	3/4" FH x 3/4" FIP	3/4"	14	16
G38S-3434-NL	3/4" FH x 3/4" FIP	3/4"	14	16

Part#	Size	D (mm)	E (mm)
G38-3412	3/4" FH x 1/2" FIP	29	23.8
G38-3412-NL	3/4" FH x 1/2" FIP	29	23.8
G38-3434	3/4" FH x 3/4" FIP	31	30
G38-3434-NL	3/4" FH x 3/4" FIP	31	30

Features

- Available in a broad range of configurations
- Lead free product available



Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)



Dimensions

Part#	Size
G50S-3434	3/4" FH x 3/4" FH
G50S-3434-NL	3/4" FH x 3/4" FH

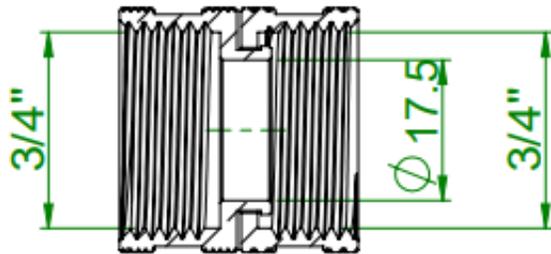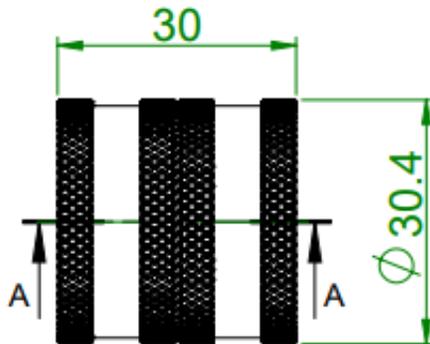


Features

- Available in a broad range of configurations
- Lead free product available

Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

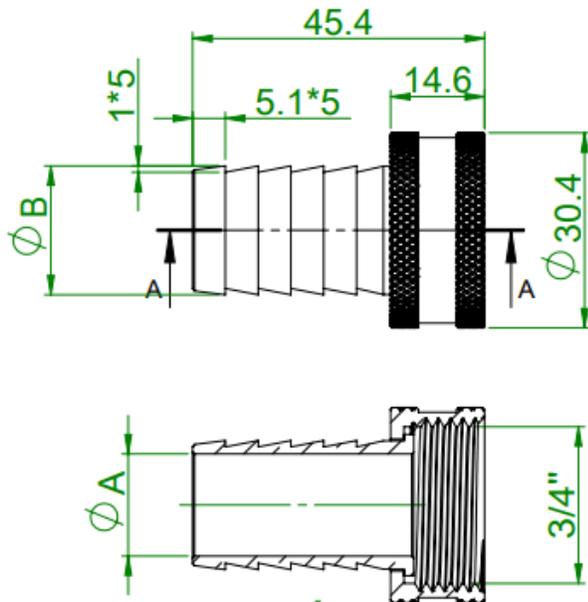

Dimensions




Part#	Size	A (mm)	B (mm)
G39S-3834	3/8" HOSE BARB x 3/4" FH SWIVEL	7.55	10.5
G39S-1234	1/2" HOSE BARB x 3/4" FH SWIVEL	10.1	13.9
G39S-1234-NL	1/2" HOSE BARB x 3/4" FH SWIVEL	10.1	13.9
G39S-3434	3/4" HOSE BARB x 3/4" FH SWIVEL	15.9	20.15
G39S-3434-NL	3/4" HOSE BARB x 3/4" FH SWIVEL	15.9	20.15
G39S-5834	5/8 HOSE BARB x 3/4" FH SWIVEL	12.1	16.5
G39S-5834-NL	5/8 HOSE BARB x 3/4" FH SWIVEL	12.1	16.5

Features

- Available in a broad range of configurations
- Lead free product available

Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

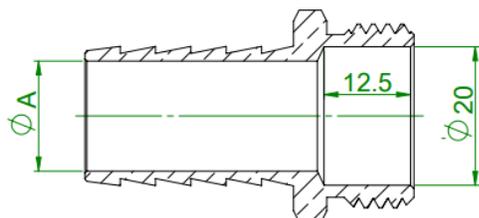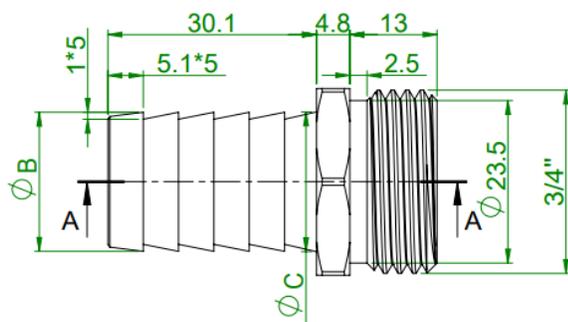

Dimensions

Part#	Size	A (mm)	B (in)	C (mm)
G40-3834	3/8" HOSE BARB x 3/4" MH	7.55	3/8"	10.5
G40-1234	1/2" HOSE BARB x 3/4" MH	10.1	1/2"	13.85
G40-1234-NL	1/2" HOSE BARB x 3/4" MH	10.1	1/2"	13.85
G40-3434	3/4" HOSE BARB x 3/4" MH	15.9	3/4"	20.2
G40-3434-NL	3/4" HOSE BARB x 3/4" MH	15.9	3/4"	20.2
G40-5834	5/8" HOSE BARB x 3/4" MH	12.1	5/8"	16.4
G40-5834-NL	5/8" HOSE BARB x 3/4" MH	12.1	5/8"	16.4

Features

- Available in a broad range of configurations
- Lead free product available


Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)



Dimensions

Part#	Size	A (mm)	B (in)	C (mm)
G41S-3414	3/4" FH x 1/4" MIP SWIVEL	9	1/4"	13.5
G41S-3412	3/4" FH x 1/2" MIP SWIVEL	15.1	1/2"	20.9

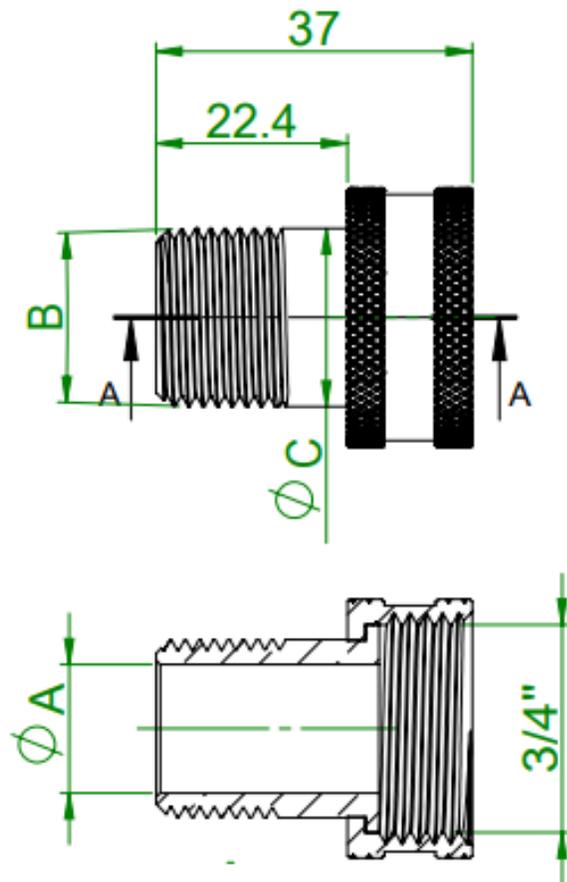

Features

- Available in a broad range of configurations
- Lead free product available



Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)



Dimensions

Part#	Size
G42-343434	3/4" MH x 3/4" MH x 3/4" FH WYE
G42-343434-NL	3/4" MH x 3/4" MH x 3/4" FH WYE


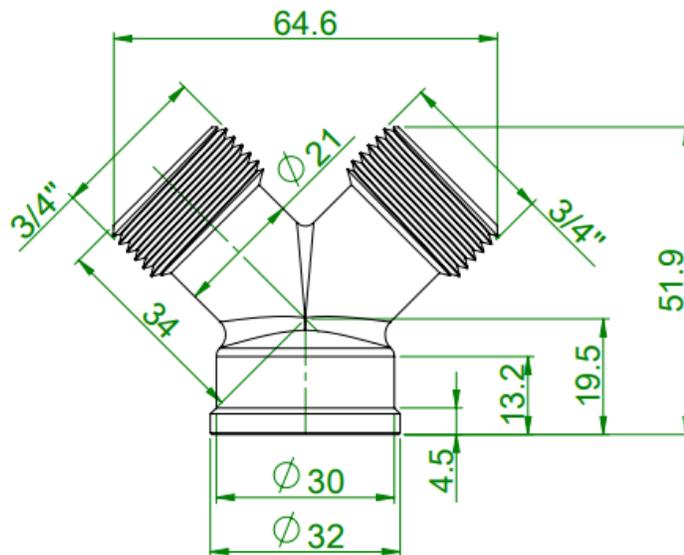
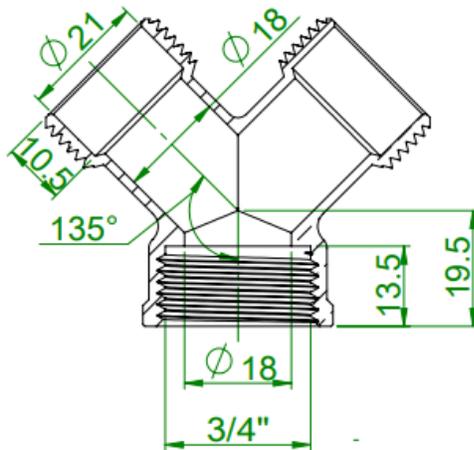


Features

- Available in a broad range of configurations
- Lead free product available


Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

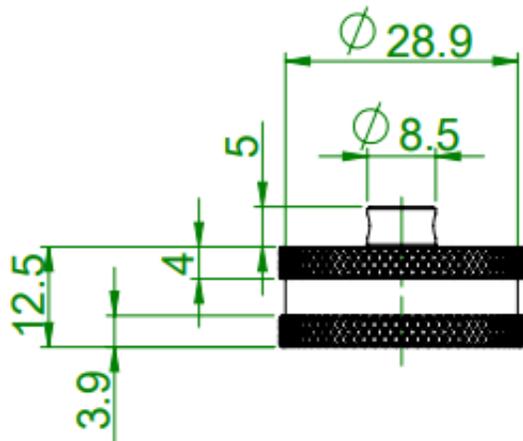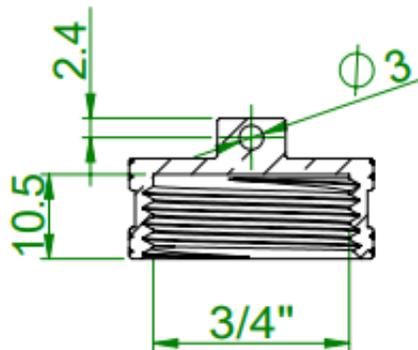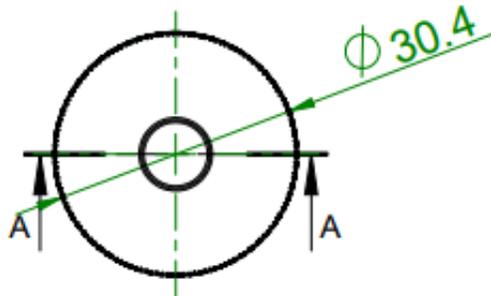

Dimensions (mm)

Part#	Size
G47-34CW	3/4" FH CAP W/ CHAIN & WASHER
G47-34W	3/4" FH CAP W/WASHER
G47-34W-NL	3/4" FH CAP W/ WASHER LEAD FREE

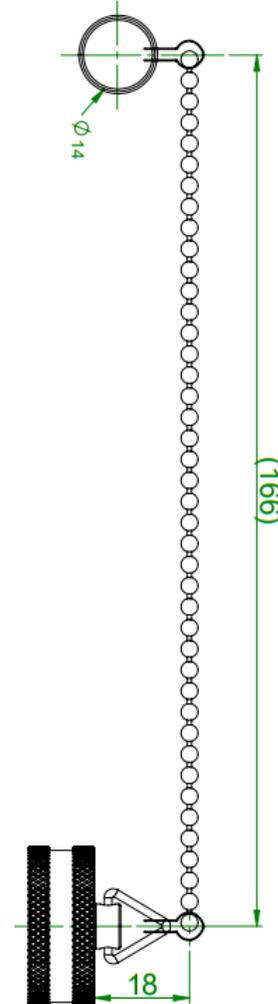


Features

- Available in a broad range of configurations
- Lead free product available

Specifications & Approvals

Temperature: -35° - 100°F max pressures
 Working Pressure: 75 PSI Maximum, intermittent to 150 PSI
 Listings & Certifications: lead free product CSA listed to NSF 372 (Class 6853-01)

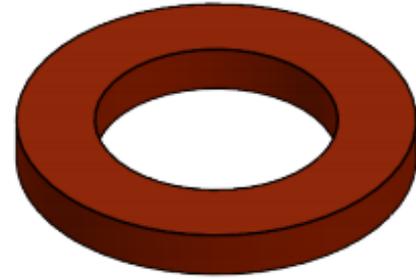

Dimensions (mm)

Part#	Size
G48-34RW	3/4"

