


**COPPER BODY • COMMERCIAL & RESIDENTIAL APPLICATIONS • LEAD FREE**

## Features

- Mini-resters approved for sealed wall installations
- No access panel required
- May be installed at any angle
- Individually bagged and barcoded

## Specifications & Approvals

Operating Pressure: 350 psi  
 Max Working Temperature: 250°F  
 Test for NSF Specifications  
 Listed by UPC/IAPMO to meet UPC-2009  
 Conforms to the ANSI/ASSE 1010-2004 Standard  
 Conforms to IPC-2009

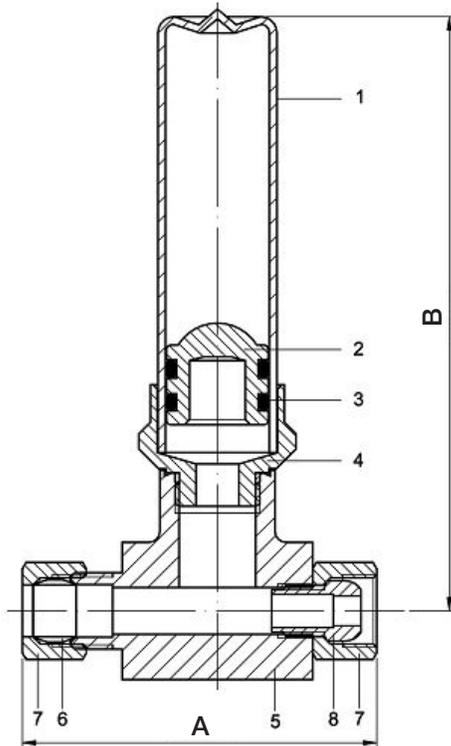

### Dimensions

Part#	A	B
HR-AA-38COMP-NL	2.603	4.373

### Material Specifications

Part Name	Material
1. Tube	Copper
2. Piston	PP+Fiber
3. O-Ring	NBR
4. Solder Cup	Modified C6802
5. OD Comp Tee	Modified C6802
6. OD Comp Ring	C3604
7. OD Comp Nut	C3604
8. Hard Cone Fitting	C3604