

SRDRST and SRDRKP

Smart Readers
Section 28 13 00



DATA SHEET

Key Features

Unit Interface Capabilities

Communication Capabilities

Mobile Compatibility

User Feedback

Model SRDRST - Standard Single Gang: None

Model SRDRKP - Standard Keypad - 10-Key keypad

Mobile BLE; 125 KHz Proximity; 13.56 MHz Smart

Works with myQ community app for iOS, Android and AppleWatch

Tri-state LED light bar (red, green, amber) and audible beeper

Specifications

Connectivity

Power Supply Voltage

(Power Supply not included)

Current

Dependent on Door Controller: CAPXLV; CAPXM, CAPXS or CAP2D
5-16 V DC

Wiegand Input Data Format

SRDRST - 120 mA average, 170 mA peak

SRDRKP - 145 mA average, 195 mA peak

26 BIT, 30 BIT, 37 BIT (HID), 37 BIT (Transcore),

32 BIT (MiFare) , 36 BIT Proximity, 56 BIT Smart

Single Gang, Surface Mount

Mounting Options

Operating Temperature

UL™ tested -35° to 66°C and EN -40° to 70°C and 95% humidity

Anti-Tamper Notification

Accelerometer-based tamper detection

Warranty

1 year

Construction

Country of Origin

United States

Material

Reader electronics are conformally coated in a silicone water
resistant coating

Regulatory

UL294 Compliant


LiftMaster®

SRDRST and SRDRKP

DATA SHEET

Smart Readers
Section 28 13 00

Dimensions

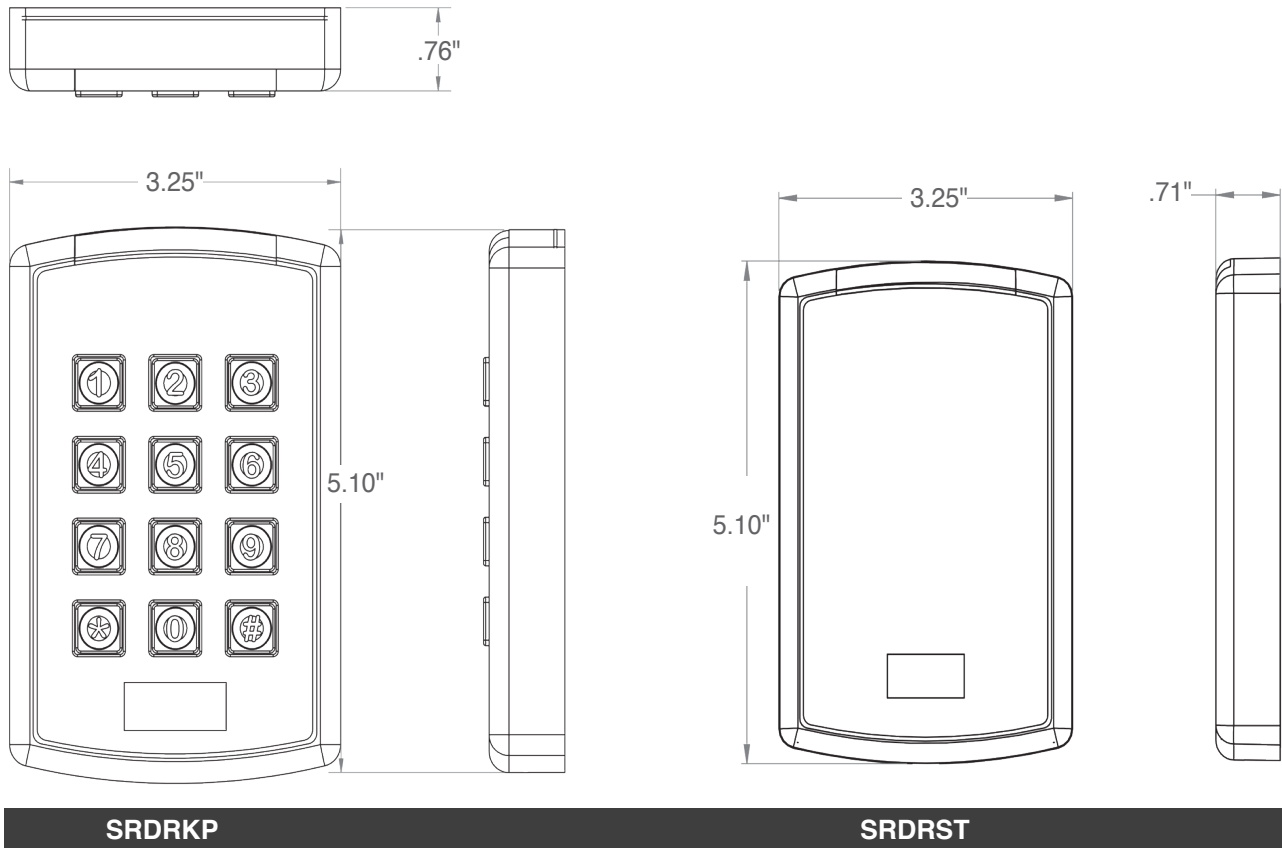

Cable Length Recommendations

Weigand	
Feet	AWG
200	22
300	20
500	18