

# CHECK 1510T

## HORIZONTAL SWING – BRONZE


150 lb. SWP-300 lb. WOG† • Industrial Service  
Teflon Disc • Sweat Ends

### SPECIFICATIONS

1510T	Conforms to: MSS SP-80. Type 4, Class 150, Threaded Ends.
-------	--

### MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Body	Bronze	ASTM B 62
2	Cap	Bronze	ASTM B 62
3	Lever	Brass	Commercial
4	Disc	Teflon	
5	Disc Holder	Brass	ASTM B 16 3/8" to 3/4" Incl.
		Bronze	ASTM B 62 1" to 2" Incl.
6	Pin	St. Steel	Commercial
7	Plug (not shown)	Brass	ASTM B 16
8	Retaining Ring	St. Steel	Commercial
9	Disc Nut	Brass	Commercial

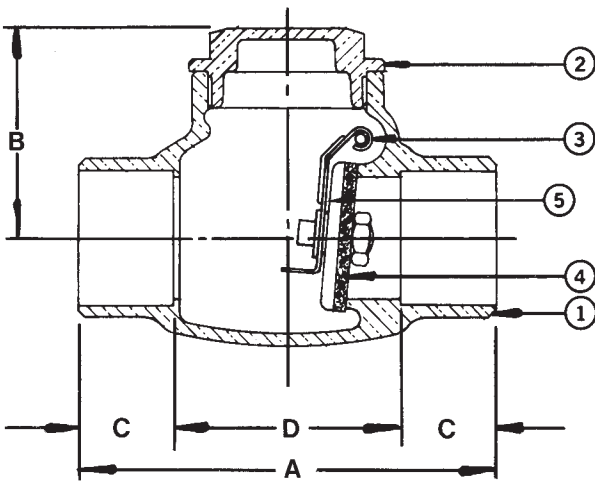

### DIMENSIONS - INCHES / MILLIMETERS

UNITS	SIZE	A	B	C	D	C <sub>v</sub>
Inches	3/8	2.25	1.44	0.38	1.50	3.3
mm	9.5	57.2	36.5	9.5	38.1	
Inches	1/2	2.56	1.44	0.50	1.56	6.0
mm	12.7	65.1	36.5	12.7	39.7	
Inches	3/4	3.31	1.69	0.75	1.75	10.0
mm	19.1	84.2	42.9	19.1	44.5	
Inches	1	4.00	1.97	0.91	2.19	18.0
mm	25.4	101.6	50.0	23.0	55.6	
Inches	1 1/4	4.25	2.16	0.97	2.31	31.0
mm	31.8	108.0	54.8	24.6	58.8	
Inches	1 1/2	4.94	2.41	1.09	2.75	54.0
mm	38.1	125.4	61.1	27.8	69.9	
Inches	2	6.13	2.81	1.34	3.44	76.0
mm	50.8	130.2	208.0	208.0	208.0	

† Non-Shock

Rev. 6

**INNOVATION** IN EVERY VALVE



**MILWAUKEE VALVE**

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access [www.milwaukeevalve.com](http://www.milwaukeevalve.com)

[www.milwaukeevalve.com](http://www.milwaukeevalve.com)