



CHECK UP1509*

HORIZONTAL SWING - BRONZE

300 lb. WOG†
Potable Water Service
Bronze Disc
Solder Ends

Dimensions and Workmanship Conform
to MSS SP-80


Designed in accordance with the requirements
of California AB 1953, Vermont S 152 and Senate Bill S3874



WQA tested and Certified
against NSF/ANSI 372
for "lead free" compliance.

MATERIAL LIST

| NO. | PART | MATERIAL | SPECIFICATION |
|-----|------------------|-----------|---------------------|
| 1 | Body | Bronze | ASTM B584 C89833 |
| 2 | Cap | Bronze | ASTM B584 C89833 |
| 3 | Pin | St. Steel | Commercial |
| 4 | Disc | Brass | ASTM B283 C27450 |
| | | Bronze | 2" ASTM B584 C89833 |
| 5 | Lever | St. Steel | Commercial |
| 6 | Retaining Ring | St. Steel | Commercial |
| 7 | Plug (not shown) | Brass | ASTM B283 C69300 |

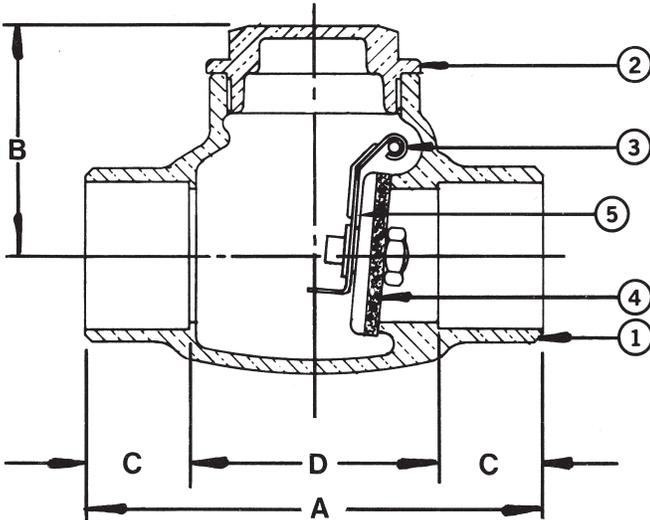

*Same design as Hammond UP912

DIMENSIONS - INCHES / MILIMETERS

| UNITS | SIZE | A | B | C | D | C _v |
|--------|-------|--------|-------|-------|-------|----------------|
| Inches | 1/2 | 2.56 | 1.44 | 0.50 | 1.56 | 6.0 |
| mm | 12.70 | 65.10 | 36.53 | 12.70 | 39.70 | |
| Inches | 3/4 | 3.31 | 1.69 | 0.75 | 1.75 | 10.0 |
| mm | 19.05 | 84.15 | 42.88 | 19.05 | 44.45 | |
| Inches | 1 | 4.00 | 1.97 | 0.91 | 2.19 | 18.0 |
| mm | 25.40 | 101.60 | 50.01 | 23.01 | 55.58 | |
| Inches | 1 1/4 | 4.25 | 2.16 | 0.97 | 2.31 | 31.0 |
| mm | 31.75 | 107.95 | 54.76 | 24.61 | 58.75 | |
| Inches | 1 1/2 | 4.94 | 2.41 | 1.09 | 2.75 | 54.0 |
| mm | 38.10 | 125.43 | 61.11 | 27.79 | 69.85 | |
| Inches | 2 | 6.13 | 2.81 | 1.34 | 3.44 | 76.0 |
| mm | 50.80 | 155.58 | 71.45 | 34.13 | 87.33 | |

† Non-Shock

Rev. 9

Milwaukee Valve Company
16550 W. Stratton Drive
New Berlin, WI 53151
Phone: 262-432-2700
Fax: 262-432-2701

Note: Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content $\leq 0.25\%$. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.milwaukeevalve.com

