

CHECK UP1548T*

BRONZE SPRING CHECK VALVE

Designed in accordance with the requirements of California AB 1953, Vermont S 152 and Senate Bill S3874



WQA tested and Certified against NSF/ANSI 372 for "lead free" compliance.


*Same design as Hammond UP947

RATING

- 250 PSI NON-SHOCK COLD WATER, OIL OR GAS

FEATURES

- BRONZE BODY
- SOLDERED ENDS
- BRONZE SPRING
- PTFE DISC RING
- BRONZE DISC HOLDER
- 100% FACTORY TESTED
- SILENT CLOSING (minimizes water hammer)

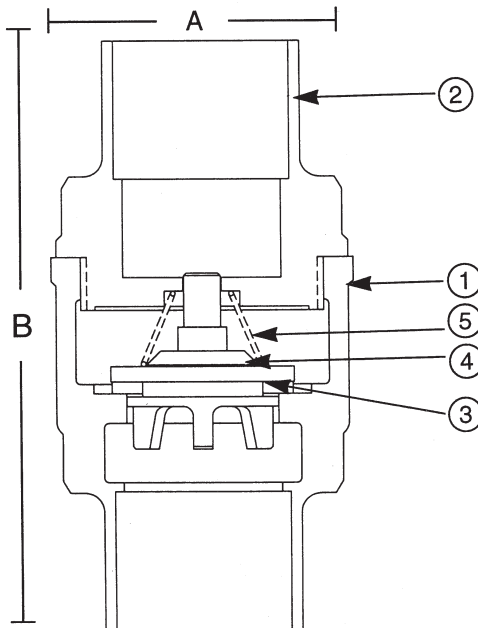

MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Body	Cast Bronze	ASTM B584 C89833
2	Tail Piece	Cast Bronze	ASTM B584 C89833
3	Disc	PTFE	
4	Disc Holder	Cast Bronze	ASTM B584 C89833
5	Spring	Bronze	ASTM B103 C52100

DIMENSIONS - INCHES / MILLIMETERS

UNITS	SIZE	A	B	Weight	C _v
Inches	3/8	1.22	2.16	0.30	2.5
mm	9.53	30.96	54.76		
Inches	1/2	1.22	2.41	0.45	4.1
mm	12.70	30.96	61.11		
Inches	3/4	1.50	3.81	0.62	7.6
mm	19.05	38.10	96.85		
Inches	1	1.91	3.53	0.97	13.0
mm	25.40	48.41	89.69		
Inches	1 1/4	2.16	4.88	1.42	23.0
mm	31.75	54.76	123.83		
Inches	1 1/2	2.59	4.22	1.84	31.0
mm	38.10	65.89	107.16		
Inches	2	3.13	5.09	2.75	54.0
mm	50.80	79.38	129.39		

Milwaukee Valve Company
16550 W. Stratton Drive
New Berlin, WI 53151
Phone: 262-432-2700
Fax: 262-432-2701

* International VALVE

Rev. 9

Note: Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content $\leq 0.25\%$. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.milwaukeevalve.com

