



Project: BENSRAW
Location: PGH
GRAYBAR

Liquidtight Flexible Non-Metallic Conduit & Fittings
T&B Catalog Number:

LT43E-NEW

UPC Number:

03448108788

Status:

Active

Description:

3/4 inch liquidtight non-metallic fitting.

Features

- Non-conductive and non-corrosive.
- Resistant to oil, acid, ozone and alkaline.
- Easy to install.
- Approved for indoor and outdoor locations
- UL listed for wet locations
- Nitrile rubber 'O' ring for a liquidtight termination.
- Temperatures up to 225 degree F (107 degree C)
- Meets UL standard 514B.

Application

For use with Carflex conduit and Carflex X-Flex conduit.

General

Trade Size (inches) 3/4
 Material Non-Metallic

Dimension Information

Size (inches) 3/4
 Degree of Bend Straight
 A (inches) 0.56
 B (inches) 0.91
 C (inches) 1.88
 D (inches) 1.61
 E (inches) 1.4

Packaging


T&B Order Multiple 50
 Package in Units 50
 T&B Sold in UOM Each
 T&B Weight Per UOM 11 lbs. per 100

Application Support

T&B Sales Drawings wsd-ac04398
 Product Overview-Carflex Liquidtight Flex-Available on Website
 ible Tubing

Certifications

RoHS Compliance Yes

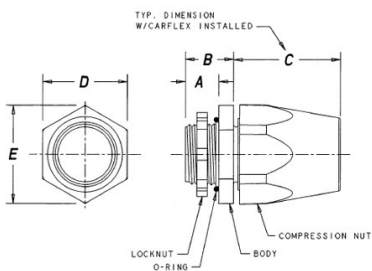

Certifications



File Nbr:
E 32447

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com