

Liquidtight Flexible Non-Metallic Conduit & Fittings

T&B Catalog Number:

LT43F-NEW

UPC Number:

03448119418

Status:

Active

Description:

1 inch liquidtight non-metallic fitting.

Features

- Non-conductive and non-corrosive.
- Resistant to oil, acid, ozone and alkaline.
- Easy to install.
- Approved for indoor and outdoor locations
- UL listed for wet locations
- Nitrile rubber 'O' ring for a liquidtight termination.
- Temperatures up to 225 degree F (107 degree C)
- Meets UL standard 514B.

Application

For use with Carflex conduit and Carflex X-Flex conduit.

General

| | |
|---------------------|--------------|
| Trade Size (inches) | 1 |
| Material | Non-Metallic |

Dimension Information

| | |
|----------------|----------|
| Size (inches) | 1 |
| Degree of Bend | Straight |
| A (inches) | 0.7 |
| B (inches) | 1 |
| C (inches) | 2.2 |
| D (inches) | 1.9 |
| E (inches) | 1.71 |

Packaging

| | |
|--------------------|----------------|
| T&B Order Multiple | 25 |
| Package in Units | 25 |
| T&B Sold in UOM | Each |
| T&B Weight Per UOM | 0.19 lbs. Each |

Application Support

| | |
|--|-------------|
| T&B Sales Drawings | wsd-ac04398 |
| Product Overview-Carflex Liquidtight Flex-Available on Website | |
| ible Tubing | |

Certifications


| | |
|-----------------|-----|
| RoHS Compliance | Yes |
|-----------------|-----|

Certifications



File Nbr:
E 32447

For further technical assistance, please contact us...

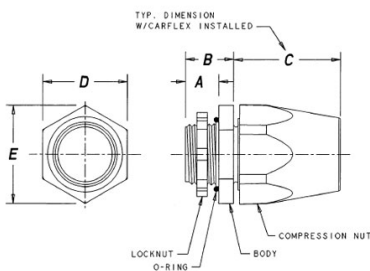

8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com