


For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

S1-**DW Stainless Steel Flexible Braided Dishwasher Water Connector - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:


- **Tough inner core** is reinforced to resist chlorine and chloramine leaching and deterioration
- **Plated brass nuts** for durability
- **Rubber washer** ensures a universal fit and long lasting water-tight connection
- **8-sided pneumatic crimp** ensures realible nut-to-hose connection
-  **No Lead**

Operating Specifications:

Temperature: 40° - 140° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)



MATERIAL SPECIFICATIONS

Inner Hose	<i>Reinforced PVC</i>
Braiding	<i>Stainless steel wire</i>
Barb	<i>Brass</i>
Ferrule	<i>Zinc plated steel</i>
Washer	<i>Rubber</i>
Compression Nut	<i>Brass</i>

Part Listing:

- ☐ S1-12DW F 3/8" compression x 3/8" compression x 12" length
- ☐ S1-16DW F 3/8" compression x 3/8" compression x 16" length
- ☐ S1-20DW F 3/8" compression x 3/8" compression x 20" length
- ☐ S1-48DW6 F 3/8" compression x 3/8" compression w/ 3/8" MIP elbow x 48" length
- ☐ S1-48DW12 F 3/8" compression x 3/8" compression w/ 3/4" garden hose elbow x 48" length
- ☐ S1-60DW F 3/8" compression x 3/8" compression x 60" length
- ☐ S1-60DW6 F 3/8" compression x 3/8" compression w/ 3/8" MIP elbow x 60" length
- ☐ S1-60DW12 F 3/8" compression x 3/8" compression w/ 3/4" garden hose elbow x 60" length
- ☐ S1-72DW6 F 3/8" compression x 3/8" compression w/ 3/8" MIP elbow x 72" length
- ☐ S1-72DW12 F 3/8" compression x 3/8" compression w/ 3/4" garden hose elbow x 72" length

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.


400.124 S1 SPP Stainless Dishwasher Connector - Compression Inlet REV 06/13

BrassCraft®

©2013 BrassCraft Mfg.

S1-**DW Stainless Steel Flexible Braided Dishwasher Water Connector - Compression Inlet

PART DIMENSIONS (Inches)	
Model	DIM. A
S1-12DW	12.0 / 13.0
S1-16DW	16.0 / 17.0
S1-20DW	20.0 / 21.0
S1-48DW6	48.0 / 49.0
S1-48DW12	48.0 / 49.0
S1-60DW	60.0 / 61.0
S1-60DW6	60.0 / 61.0
S1-60DW12	60.0 / 61.0
S1-72DW6	72.0 / 73.0
S1-72DW12	72.0 / 73.0

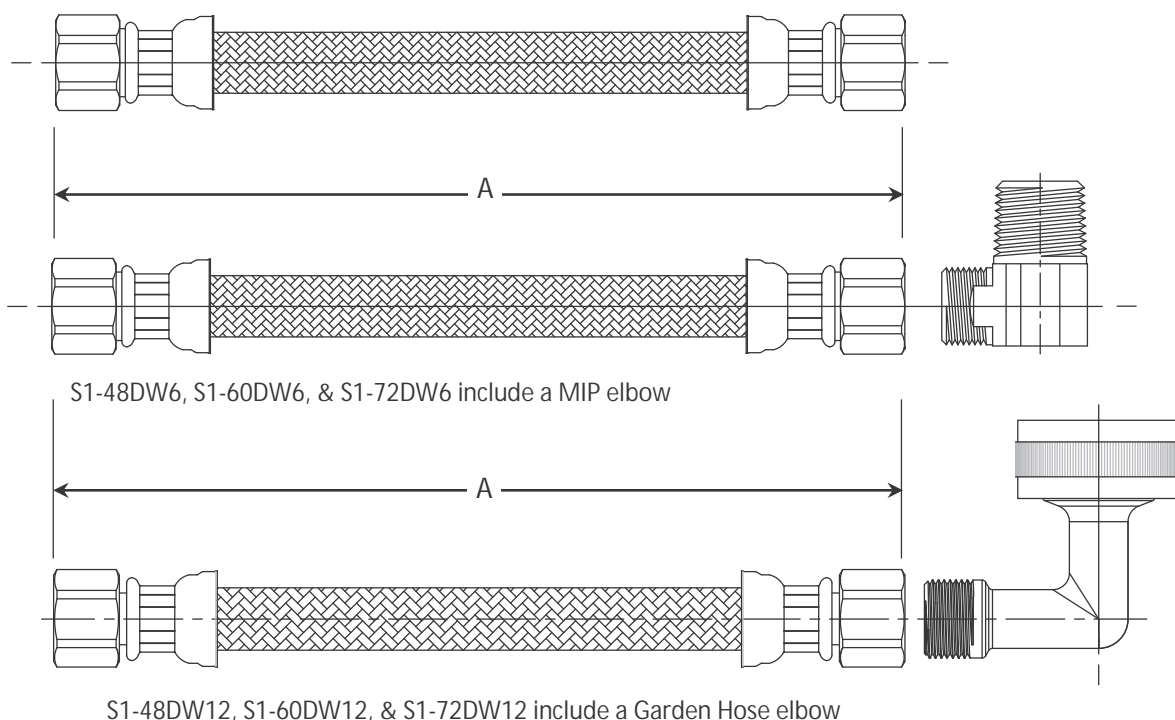

Listings & Certifications:

- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- No Lead product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01
- Tubing material is formulated with food grade ingredients and certified by NSF to standard 51 Food Equipment Materials



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

400.124 S1 SPP Stainless Dishwasher Connector - Compression Inlet REV 06/13

BrassCraft

©2013 BrassCraft Mfg.