

Steel Octagon Boxes & Ceiling Pans

3 1/4" ROUND CEILING PAN† – 4.0 CUBIC INCH CAPACITY

1/2" DEEP
CLAMPS IN BOTTOM
FIXTURE RATED
UL LISTED




TP266


Cat. #	KNOCKOUTS		Unit Qty.	Wt. Lbs. Per 100
	Cable	Conduit		
TP266	4 – Cable	1 – 1/2"	50	30

3 1/4" OCTAGON OUTLET BOXES† – 9.0 CUBIC INCH CAPACITY


1 1/2" DEEP
FIXTURE RATED
UL LISTED



TP256




TP258



TP259



TP260




TP264

		KNOCKOUTS			
Cat. #	Description	Sides	Bottom	Unit Qty.	Wt. Lbs. Per 100
FOR CONDUIT – NO CLAMPS					
TP256	—	4 – 1/2"	1 – 1/2"	50	41
TP258	Extension Ring	4 – 1/2"	—	50	31
FOR NONMETALLIC CABLE WITH CLAMPS					
TP259	"S" Bracket, Set 1/2"	4 – Cable, 1 – 1/2"	1 – 1/2"	50	53
TP260	—	4 – Cable, 2 – 1/2"	1 – 1/2"	50	44
TP264	Two Screw Ears	4 – Cable, 2 – 1/2"	1 – 1/2"	50	47

†Weight limit for 3 1/4" and 4" octagon outlet boxes and ceiling pans is 50 lbs. for fixture/luminaire. Not suitable for fans.

3 1/4" ROUND CEILING COVERS

UL LISTED



TP270



TP272

Cat. #	KNOCKOUTS		Unit Qty.	Wt. Lbs. Per 100
	Cable			
TP270	Flat Blank		100	18
TP272	Flat, 1/2" KO in Center		100	18

Crouse-Hinds
by **Eaton**

Steel Octagon Boxes & Ceiling Pans

4" ROUND CEILING PANS* – 6.0 CUBIC INCH CAPACITY

1/2" DEEP
FIXTURE RATED
UL LISTED

CP



TP269



TP267

KNOCKOUTS

Cat. #	Description	Sides	Bottom	Unit Qty.	Wt. Lbs. Per 100
TP269	KOs Only	—	5 – 1/2"	50	35
TP267	KOs and Clamps	—	4 – Cable, 3 – 1/2"	50	39

*Weight limit for 3/4" and 4" octagon outlet boxes and ceiling pans is 50lbs for fixture.
 Not suitable for fans.

4" OCTAGON OUTLET BOXES† – 15.5 CUBIC INCH CAPACITY


1 1/2" DEEP
FOR CONDUIT – NO CLAMPS
FIXTURE RATED
UL LISTED




TP274, TP278,
TP834*




TP276



TP273



TP280



TP282



TP284, TP286

KNOCKOUTS

Cat. #	Description	Sides	Bottom	Unit Qty.	Wt. Lbs. Per 100
TP274	—	4 – 1/2"	5 – 1/2"	50	50
TP273	Blank Bottom	4 – 1/2"	—	50	51
TP276	—	4 – 3/4"	3 – 1/2", 2 – 3/4"	50	50
TP278	—	2 – 1/2", 2 – 3/4"	3 – 1/2", 2 – 3/4"	50	50
TP280	"C" Bracket	4 – 1/2"	5 – 1/2"	50	60
TP282	"S" Bracket, Set 1/2"	3 – 1/2"	5 – 1/2"	50	58

Air Plenum

TP834*	For Air Plenum	4 – 1/2"	5 – 1/2"	50	52
--------	----------------	----------	----------	----	----

OCTAGON EXTENSION RINGS – (SLOT & KEY PERMIT MOUNTING WITHOUT REMOVING BOX SCREWS)

TP284‡	—	4 – 1/2"	—	50	36
TP286‡	—	2 – 1/2", 2 – 3/4"	—	50	36

*For Air Plenum (No Mounting Holes) - Not UL Listed.

†Weight limit for 3/4" and 4" octagon outlet boxes and ceiling pans is 50 lbs for fixture/luminaire. Not suitable for fans.

‡CSA Certified.

Steel Octagon Boxes & Ceiling Pans


4" OCTAGON OUTLET BOXES† – 15.5 CUBIC INCH CAPACITY

1½" DEEP


FOR ARMORED & METAL CLAD (MCI) CABLE – CLAMPS IN EACH END

FIXTURE RATED


UL LISTED



TP310



TP312



TP314

Cat. #	Description	KNOCKOUTS		Unit Qty.	Wt. Lbs. Per 100
		Sides	Bottom		
TP310*	—	4 – Cable, 2 – ½"	1 – ½"	50	57
TP312*	"C" Bracket	4 – Cable, 2 – ½"	1 – ½"	50	66
TP314*	"S" Bracket, Set ½"	4 – Cable, 1 – ½"	1 – ½"	50	64

*UL approved for use with aluminum interlocking grounding metal clad cable, Type MCIA (Southwire MCAP™)
MCAP™ is a registered trademark of Southwire Company.
† Weight limit for 3¼" and 4" octagon outlet boxes and ceiling pans is 50lbs for fixture/luminaire. Not suitable for fans

4" OCTAGON OUTLET BOXES† – 15.5 CUBIC INCH CAPACITY

1½" DEEP


FOR NONMETALLIC CABLE – WITH CLAMPS

FIXTURE RATED


UL LISTED




TP298



TP300




TP302



TP304



TP306



TP308

Cat. #	Description	KNOCKOUTS		Unit Qty.	Wt. Lbs. Per 100
		Sides	Bottom		
TP298	—	4 – Cable, 2 – ½"	1 – ½"	50	56
TP300	With Side Nail Holes	4 – Cable, 2 – ½"	1 – ½"	50	55
TP302	"C" Bracket	4 – Cable, 2 – ½"	1 – ½"	50	65
TP304	"S" Bracket, Set ½"	4 – Cable, 1 – ½"	1 – ½"	50	64
TP306	Two Screw Ears	4 – Cable, 2 – ½"	1 – ½"	50	58
TP308	"F" Bracket, Set ½"	4 – Cable, 1 – ½"	1 – ½"	50	64

† Weight limit for 3¼" and 4" octagon outlet boxes and ceiling pans is 50lbs for fixture/luminaire. Not suitable for fans

CP

Steel Octagon Boxes & Ceiling Pans

4" OCTAGON OUTLET BOXES† – 21.5 CUBIC INCH CAPACITY

2 1/8" DEEP

FOR CONDUIT – NO CLAMPS

FIXTURE RATED

UL LISTED

CP




TP288, TP290, TP294



TP292, TP838*



TP292RED



TP339

KNOCKOUTS

Cat. #	Description	Sides	Bottom	Unit Qty.	Wt. Lbs. Per 100
TP288	—	4 – 1/2"	3 – 1/2", 2 – 3/4"	25	64
TP288PF‡	—	4 – 1/2"	3 – 1/2", 2 – 3/4"	25	64
TP290	—	4 – 3/4"	3 – 1/2", 2 – 3/4"	25	64
TP290PF‡	—	4 – 3/4"	3 – 1/2", 2 – 3/4"	25	64
TP292	—	2 – 1/2", 2 – 3/4"	3 – 1/2", 2 – 3/4"	25	64
TP292PF‡	—	2 – 1/2", 2 – 3/4"	3 – 1/2", 2 – 3/4"	25	64
TP292RED	—	2 – 1/2", 2 – 3/4"	3 – 1/2", 2 – 3/4"	25	64
TP294	—	4 – 1"	3 – 1/2", 2 – 3/4"	25	64
TP339	Blank Bottom	4 – 1/2"	—	25	65
Air Plenum					
TP838*	Plenum	2 – 1/2", 2 – 3/4"	3 – 1/2", 2 – 3/4"	25	62

*For Air Plenum (No Mounting Holes) - Not UL Listed

‡TP catalog numbers ending in PF includes ground screw with pigtail lead


† Weight limit for 3/4" and 4" octagon outlet boxes and ceiling pans is 50lbs for fixture/luminaire. Not suitable for fans

4" OCTAGON OUTLET BOXES† – 21.5 CUBIC INCH CAPACITY


2 1/8" DEEP – WITH CABLE CLAMPS

FIXTURE RATED


UL LISTED




TP316




TP318



TP320



TP317



TP338

KNOCKOUTS

Cat. #	Description	Sides	Bottom	Unit Qty.	Wt. Lbs. Per 100
FOR NONMETALLIC CABLE					
TP316	—	4 – Cable, 2 – 1/2"	1 – 1/2"	25	68
TP318	"C" Bracket	4 – Cable, 2 – 1/2"	1 – 1/2"	25	88
TP320	"S" Bracket, Set 1/2"	4 – Cable, 1 – 1/2"	1 – 1/2"	25	81
FOR ARMORED & METAL CLAD (MCI) – CABLE-CLAMPS IN EACH END					
TP317*	—	4 – Cable, 2 – 1/2"	1 – 1/2"	25	69
TP338*	"S" Bracket, Set 1/2"	4 – Cable, 1 – 1/2"	1 – 1/2"	25	82
TP338PF‡	"S" Bracket, Set 1/2"	4 – Cable, 1 – 1/2"	1 – 1/2"	25	82

*UL approved for use with aluminum interlocking grounding metal clad cable, Type MCIA (Southwire MCAP™)

MCAP™ is a registered trademark of Southwire Company.

‡TP catalog numbers ending in PF includes ground screw with pigtail lead

† Weight limit for 3/4" and 4" octagon outlet boxes and ceiling pans is 50lbs for fixture/luminaire. Not suitable for fans

Steel Octagon Covers & Accessories


4" OCTAGON BOX AND ADJUSTABLE BAR SETS – 15.5 CUBIC INCH CAPACITY

1½" DEEP BOX SETS

FIXTURE RATED

UL LISTED


Weight Limits: 35 lbs. at 16", 15 lbs. at 24"

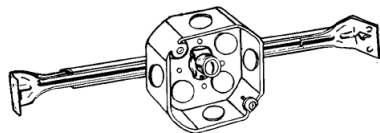

TP372



TP377

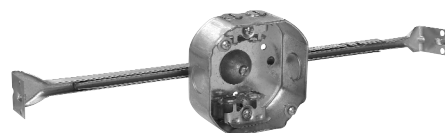

TP367

Cat. #	Stud Spacing	Stud	Unit Qty.	Wt. Lbs. Per 100
FOR CONDUIT – NO CLAMPS				
TP372*	16" – 24"	Yes	25	85
FOR NONMETALLIC CABLE – WITH CLAMPS				
TP377	16" – 24"	—	25	102
FOR ARMORED & METAL CLAD (MCI) CABLE – CLAMPS IN EACH END				
TP367	16" – 24"	—	25	100
TP367PF†	16" – 24"	—	25	100

*4" Octagon Box and Adjustable Bar Sets have ½" KOs for conduit

†TP catalog numbers ending in PF includes ground screw with pigtail lead

ADJUSTABLE BAR HANGERS

UL LISTED

Features:

- Holding prong holds box in place for nailing
- Design resists bending and twisting
- Locking tabs to hold bar in position
- Weight Limits: 50 lbs. at 16"; 21 lbs. at 24"



TP356


Cat. #	Stud Spacing	Length	Stud	Unit Qty.	Wt. Lbs. Per 100
TP356	16" & 24"	14" – 22½"	—	50	41

Steel Octagon Covers & Accessories


4" OCTAGON BOX COVERS – CUBIC CAPACITY (SEE BELOW)

UL LISTED

CP




TP322
TP853*




TP323




TP326, TP331,
TP332, TP333




TP328




TP330



TP329



TP335



TP334



TP336

Cat. #	Description	Capacity Cu. In.	Unit Qty.	Wt. Lbs. Per 100
TP322†	Flat Blank – Octagon Shape	—	50	22
TP322RED†	Flat Blank – Octagon Shape	—	50	22
TP323†	Flat Blank – Round Shape	—	50	24
TP333	Raised 1", Open With Ears 2 ³ / ₄ "	7.0	25	30
TP332	Raised 1/2", Open With Ears 2 ³ / ₄ "	3.3	50	22
TP326	Raised 5/8", Open With Ears 2 ³ / ₄ "	3.8	50	20
TP331	Raised 3/4", Open With Ears 2 ³ / ₄ "	5.0	50	26
TP328†	Flat With 1/2" KO – Octagon Shape	—	50	22
TP330	Raised 5/8", With 1/2" KO	3.8	50	31
TP329†	Flat With 1/2" KO – Round Shape	—	50	24
TP335	Flat, For Toggle Switch	—	50	23
TP334‡	Flat, Single Receptacle 1 ¹³ / ₃₂ "	—	50	21
TP336	Flat, For Duplex Receptacle	—	50	18
Air Plenum				
TP853*‡	Flat, Blank With PVC Gasket	—	50	24

*For Air Plenum (No Mounting Holes)

†CSA Certified

‡ Not UL Listed

FLEXIBLE FIXTURE HANGERS

Eaton's Crouse-Hinds TPRFH flexible fixture hangers are used in commercial or light industrial applications where HID high bay and low bay lighting fixtures are used. Specific applications include storage facilities, shipping warehouses, retail and DIY facilities.

Features and Benefits:

- Suitable for use with 1/2" or 3/4" fixture conduit stems these hangers allow the conduit stem of the fixture (luminaire) to swing in any direction. Maximum swing angle is 26° from vertical max slope angles 22 1/2°
- Available for attachment to round or octagonal steel boxes.
- Quickly and easily attached by two screws.
- Hangers are drilled and tapped for use with 3/4" conduit stem as standard and come supplied with a 3/4" – 1/2" reducer for 1/2" conduit stem applications.

Certifications and Compliances:

- UL Listed – UL 1598
- CSA C22.2 No. 250
- Suitable for Damp Locations

Standard Materials and Finishes:

- Material: Sheet Steel
- Finish: Zinc Chromate for corrosion resistance



Description	Support Wt. (lbs)	Cat. #
For use with 4" Round or Octagon Boxes	50	TPRFH12