

Features

- Union end with double o-ring slider
- Expandable coupling
- Heavy PVC construction

Specifications & Approvals

Pressure rating 150 PSI at 73°F
 Complies to ASTM D1784 & D2466
 ISO 9002, ANSI B1.20.1, ASTM F1970
 Conforms to NSF/ANSI 61 & 372,
 For cold water use only




Dimensions

PART #	SIZE	D1	D2	D3	L	EXPANDS	
						FROM	TO
345RC012	1/2"	1.90	0.848	0.84	6.67	6-3/4	8-1/2
345RC034	3/4"	2.12	1.058	1.05	7.54	7-1/2	9-3/4
345RC100	1"	2.59	1.325	1.32	8.74	8-3/4	11-1/4
345RC114	1-1/4"	2.99	1.670	1.66	9.79	9	11-3/4
345RC112	1-1/2"	3.26	1.912	1.89	9.94	10	13
345RC200	2"	3.72	2.387	2.37	11.33	11-1/4	14-1/4
345RC212	2-1/2"	4.22	2.889	2.87	12.60	12-1/2	17
345RC300	3"	4.94	3.516	3.49	13.45	13-1/4	17-3/4
345RC400	4"	6.18	4.518	4.49	14.83	14-3/4	19-1/2

Materials

Part Name	Material
1. Body	PVC
2. Slip Tube	PVC
3. O-Ring	EPDM
4. O-Ring	EPDM
5. Compression Nut	PVC

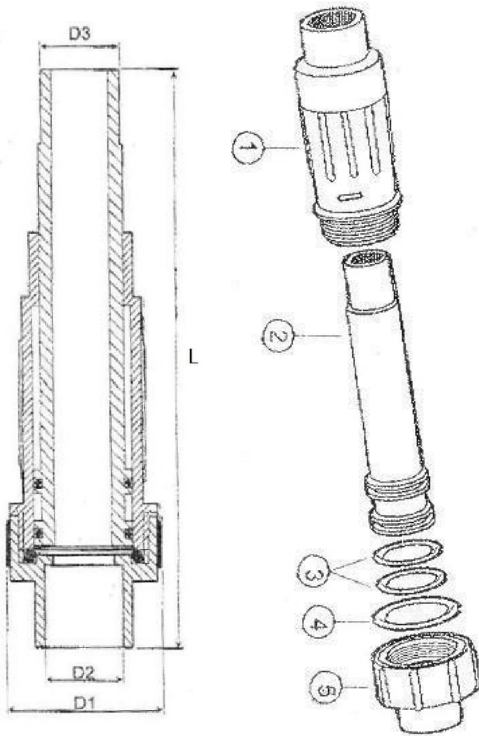

Engineer's Approval

Job Name / # _____

Contractor _____ Date _____

Job Location _____

Engineer _____ Date _____