

## Features

- Fits Schedule 80 Pipe
- Compatible with PVC Piping
- Not Suitable for Compressed Air or Steam Service Applications
- EPDM O-Ring


## Specifications & Approvals

150 PSI at 73°F

Maximum Service Temperature 140°F

Threaded ends comply with ANSI B1.20.1

NSF Listed to NSF 14 , 61 & 372

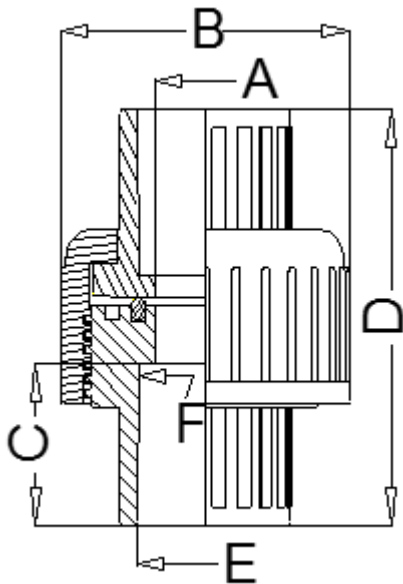

## Dimensions

| Part#    | Size   | A (in) | B (in) | C (in) | D (in) | E (in) | F (in) |
|----------|--------|--------|--------|--------|--------|--------|--------|
| 385CU012 | 1/2"   | 0.590  | 2.165  | 0.875  | 2.205  | 0.848  | 0.836  |
| 385CU034 | 3/4"   | 0.787  | 2.571  | 1.000  | 2.531  | 1.068  | 1.046  |
| 385CU100 | 1"     | 0.984  | 2.890  | 1.125  | 2.835  | 1.325  | 1.310  |
| 385CU114 | 1-1/4" | 1.260  | 3.157  | 1.250  | 3.098  | 1.670  | 1.656  |
| 385CU112 | 1-1/2" | 1.576  | 3.653  | 1.375  | 3.425  | 1.912  | 1.894  |
| 385CU200 | 2"     | 1.968  | 4.094  | 1.500  | 3.680  | 2.387  | 2.369  |

## Materials

| Part Name        | Material |
|------------------|----------|
| 1. Nut           | PVC      |
| 2. End Connector | PVC      |
| 3. O-Ring        | EPDM     |
| 4. Body          | PVC      |