

MALE THREADED X CPVC • LEAD FREE

Features


- Transition fitting for connecting threaded pipe with CPVC pipe
- Suitable for use in both residential and light commercial plumbing systems
- Durable over molded one-piece fitting eliminates potential leak path
- Molded CPVC end piece with slip connection
- Lead free brass material
- Stocked in 1/2" - 2"



Specifications & Approvals

Pressure Rating: 100 PSI at 180° / F150 PSI at 100°F

- Truesdail Laboratories certified to meet:
 - NSF/ANSI 61 Section 8
 - NSF/ANSI 61 Annex F
 - NSF/ANSI 61 Annex G
 - NSF/ANSI 372
- Weighted Average Lead Content $\leq 0.25\%$
- Conforms to material and dimensional requirements of ASTM D-2846
- Threaded ends conform to ASME B 1.20.1

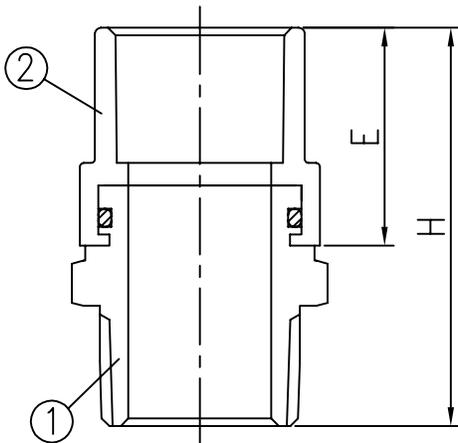

Dimensions

Part#	Size	H	E
BRCPM012-NL	1/2"	46	25
BRCPM034-NL	3/4"	53	30
BRCPM100-NL	1"	66	36
BRCPM114-NL	1-1/4"	78	43.4
BRCPM112-NL	1-1/2"	84	49.2
BRCPM200-NL	2"	99	61.1

Material Specifications

Part Name	Material
1. Fitting	C46400 Brass
2. CPVC	CPVC 4120

FEMALE THREADED X CPVC • LEAD FREE

Features


- Transition fitting for connecting threaded pipe with CPVC pipe
- Suitable for use in both residential and light commercial plumbing systems
- Durable over molded one-piece fitting eliminates potential leak path
- Molded CPVC end piece with slip connection
- Lead free brass material
- Stocked in 1/2" - 2"



Specifications & Approvals

Pressure Rating: 100 PSI at 180° / F150 PSI at 100°F

- Truesdail Laboratories certified to meet:
 - NSF/ANSI 61 Section 8
 - NSF/ANSI 61 Annex F
 - NSF/ANSI 61 Annex G
 - NSF/ANSI 372
- Weighted Average Lead Content $\leq 0.25\%$
- Conforms to material and dimensional requirements of ASTM D-2846
- Threaded ends conform to ASME B 1.20.1

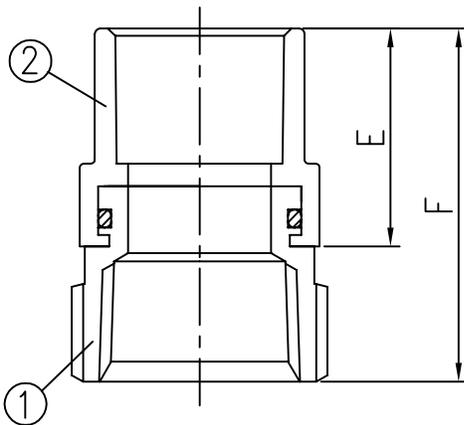

Dimensions

Part#	Size	F	E
BRCPF012-NL	1/2"	41.5	25
BRCPF034-NL	3/4"	47	30
BRCPF100-NL	1"	57	36
BRCPF114-NL	1-1/4"	66	43.4
BRCPF112-NL	1-1/2"	72	49.2
BRCPF200-NL	2"	85	61.1

Material Specifications

Part Name	Material
1. Fitting	C46400 Brass
2. CPVC	CPVC 4120

FEMALE THREADED X CPVC • LEAD FREE • DROP EAR ELBOW

Features

- Transition fitting for connecting threaded pipe with CPVC pipe
- Suitable for use in both residential and light commercial plumbing systems
- Durable over molded one-piece fitting eliminates potential leak path
- Molded CPVC end piece with slip connection
- Lead free brass material
- Stocked in 1/2"



Specifications & Approvals

Pressure Rating: 100 PSI at 180° / F150 PSI at 100°F

- Truesdail Laboratories certified to meet:
 - NSF/ANSI 61 Section 8
 - NSF/ANSI 61 Annex F
 - NSF/ANSI 61 Annex G
 - NSF/ANSI 372
- Weighted Average Lead Content $\leq 0.25\%$
- Conforms to material and dimensional requirements of ASTM D-2846
- Threaded ends conform to ASME B 1.20.1

Dimensions

Part#	Size	L	K	J
BRCPD012-NL	1/2"	46	25	52

Material Specifications

Part Name	Material
1. Fitting	C46400 Brass
2. CPVC	CPVC 4120

