

BEAM CLAMPS

Designed to attach hanger rod to the flange of beams

- No Drilling or welding to existing structure
- Clamps directly to the existing structure
- Underwriters Laboratories Listed (UL) and Factory Mutual Approved (FM)
- Complies with Federal Specifications WW-H-171E & A-A-1192A Type 19, Manufacturers Standardization Society (MSS) ANSI/SP-69 & SP-58 Type 19


Sizes: 3/8" - 7/8"

Material: Malleable Iron & Steel

Finish: Electro Galvanized & Plain

Approvals: FM, UL, Complies with WW-H-171E & A-A-1192A Type 19, MSS ANSI/SP-69 & SP-58 Type 19

SIZE INCHES	ITEM ELECTRO GALVANIZED	ITEM PLAIN	MAX LOAD TOP	MAX LOAD BOTTOM	WEIGHT LBS	A ROD SIZE	B	C	D	E	F	INNER BOX	MASTER BOX	PALLET QTY
3/8"	CLBS-GE38	CLBS-B38	610	610	0.320	3/8	1-5/16	1-1/2	1	3/4	1/2	10	100	4800
1/2"	CLBS-GE12	CLBS-B12	750	1130	0.320	1/2	1-5/16	1-1/2	1	3/4	1/2	10	100	4800
5/8"	CLBS-GE58	CLBS-B58	750	1130	0.580	5/8	1-3/4	1-3/4	1-3/8	3/4	5/8	5	50	2400
3/4"	CLBS-GE34	CLBS-B34	750	1130	0.820	3/4	1-7/8	1-7/8	1-3/8	3/4	5/8	5	50	2400
7/8"	CLBS-GE78	CLBS-B78	750	1130	0.795	7/8	2-3/8	1-7/8	1-3/8	3/4	5/8	5	50	2400

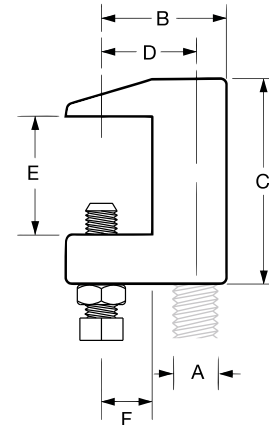

WIDE MOUTH BEAM CLAMPS

Designed to attach hanger rod to the flange of beams

- Wider throat for attaching to flange with up to 1 1/4" thickness.
- Attached to horizontal flanges of structures in either the top or bottom beam positions.
- Secured in place by a cup-pointed Set Screw tightened against the flange. A Jam Nut is provided for tightening the Set Screw against the Body Casting.
- Underwriters Laboratories Listed (UL) and Factory Mutual Approved (FM)
- Complies with Federal Specifications WW-H-171E & A-A-1192A Type 19, Manufacturers Standardization Society (MSS) ANSI/SP-69 & SP-58 Type 19

Sizes: 3/8" - 3/4"

Material: Malleable Iron & Steel

Finish: Electro Galvanized & Plain

Approvals: FM, UL, Complies with WW-H-171E & A-A-1192A Type 19, MSS ANSI/SP-69 & SP-58 Type 19

SIZE INCHES	ITEM ELECTRO GALVANIZED	ITEM PLAIN	MAX LOAD TOP	MAX LOAD BOTTOM	WEIGHT LBS	A ROD SIZE	B	C	D	E	F	INNER BOX	MASTER BOX	PALLET QTY
3/8"	CLBW-GE38	CLBW-B38	610	610	0.55	3/8	1-3/8	2	1	1-1/4	1/2	10	100	4800
1/2"	CLBW-GE12	CLBW-B12	750	1130	0.56	1/2	1-3/8	2	1	1-1/4	1/2	10	100	4800
5/8"	CLBW-GE58	CLBW-B58	750	1130	0.66	5/8	1-7/8	2-3/8	1-3/8	1-1/4	5/8	5	50	2400
3/4"	CLBW-GE34	CLBW-B34	750	1130	0.83	3/4	1-7/8	2-3/8	1-3/8	1-1/4	5/8	5	50	2400