


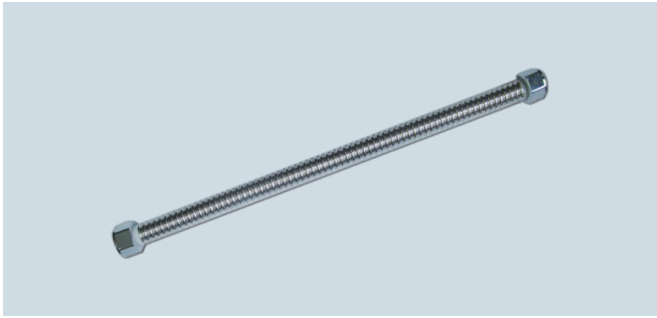

Model: FTWC-S34-12A FTWC-S34-15A FTWC-S34-18A
FTWC-S34-24A FTWC-S34-18F FTWC-S34-24C
FTWC-S34-18D FTWC-S34-24D FTWC-S01-12H
FTWC-S01-18H FTWC-S01-24H FTWC-S34-18E
FTWC-S34-24E

Stainless steel Corrugated Water Heater Connector

DIMENSIONS

3/4 FIP X 3/4 FIP X 12"	FTWC-S34-12A
3/4 FIP X 3/4 FIP X 15"	FTWC-S34-15A
3/4 FIP X 3/4 FIP X 18"	FTWC-S34-18A
3/4"FIP X 3/4"FIP X 24"	FTWC-S34-24A
3/4"FIP X 3/4"PEX X 18"	FTWC-S34-18F
3/4"FIP X 3/4"FIP PUSH IN X 24"	FTWC-S34-24C
1" FIP X 3/4" FIP X 18"	FTWC-S34-18D
1" FIP X 3/4 FIP X 24"	FTWC-S34-24D
1"FIP X 1 FIP X 12"	FTWC-S01-12H
1 FIP" X 1 FIP X 18"	FTWC-S01-18H
1 FIP" X 1 FIP X 24"	FTWC-S01-24H
3/4"FIP X 3/4" SWEAT X 18"	FTWC-S34-18E
3/4"FIP X 3/4" SWEAT X 24"	FTWC-S34-24E

MATERIAL SPECIFICATION

PART	MATERIAL
Operating Pressure	125PSI Maximun
Operating Temperature	40-140°F
Nut	Hpb58-3
Hose	304 Stainless steel
Rubber Gaskets	EPDM