

HRSA - HD Pipe Roller With Socket

Designed for Suspension of Pipe From Two Rods


- Maximum temperature 450°F
- Complies with Federal Specification A-A-1192A Type 41, WW-H-171-E Type 42, ANSI/MSS SP-69 and MSS SP-58 Type 41
- Provides for vertical adjustment; nut at bottom of hanger rod fits into the socket preventing loosening or turning due to vibration.

Sizes: 2" - 16"

Material: Steel

Finish: Hot Dipped Galvanized

Approvals: Complies with ANSI/MSS SP-69 MSS SP-58 Type 41, A-A-1192A Type 41, WW-H-171-E Type 42

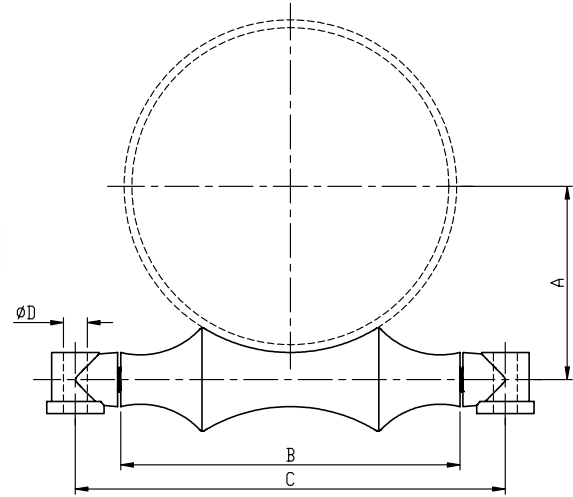

ITEM	SIZE INCHES	MAX LOAD (LBS)	A	B	C	D	EA WEIGHT
HRSA-HD02	2"	600	1-5/8"	2-7/8"	4-1/2"	1/2"	0.55
HRSA-HD03	3"	700	2-1/4"	3-3/4"	5-9/16"	5/8"	1.09
HRSA-HD04	4"	750	2-3/4"	4-3/4"	6-3/4"	3/4"	1.6
HRSA-HD05	5"	750	3-1/2"	5-3/4"	8-3/8"	13/16"	2.34
HRSA-HD06	6"	1,070	4"	6-7/8"	9-7/8"	7/8"	3.99
HRSA-HD08	8"	1,350	5-1/8"	8-7/8"	12"	1"	5.95
HRSA-HD10	10"	1,730	6-3/8"	11"	14"	1"	8.49
HRSA-HD12	12"	2,400	7-1/2"	12-1/2"	16-1/5"	1"	13.23
HRSA-HD14	14"	3,130	8-3/8"	14-3/8"	17-3/4"	1-1/8"	21.77
HRSA-HD16	16"	3,970	9-1/2"	16-3/8"	20-3/4"	1-1/8"	29.99

Engineer's Approval

Job Name / # _____

Contractor _____ Date _____

Job Location _____

Engineer _____ Date _____