

Brass Fittings • Spec Sheet



Threaded Fittings

ASTM B62-93-93 (C83600) 85-5-5-5
ANSI/ASME B1.20.1
ANSI/ASME B16.5
ANSI B16.18, B16.3 Class 125
ISO 9001:2000
Fed Spec. WW-P460C MSS-SP-106
ASTM B584-93B
Unions WW-U-516B
UL/FM Listed & Approved – EX15226
NSF-372 Approved

Threaded Flanges


ASTM B62
ASME B16.24
ASME B1.20.1, Class 150
ISO 9001:2000



MATCO-NORCA
Global sourcing. National compliance. Local service.


Brass Fittings • Spec Sheet

Brass Plug

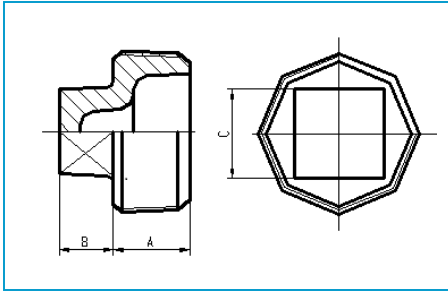


Size	1/8	1/4	3/8	1/2	3/4	1
A	0.27	0.41	0.41	0.54	0.55	0.69
B	0.24	0.28	0.31	0.38	0.44	0.50
C	0.28	0.37	0.43	0.56	0.62	0.81
Size	1-1/4	1-1/2	2	2-1/2	3	4
A	0.73	0.73	0.76	1.07	1.13	1.22
B	0.57	0.56	0.62	0.68	0.74	0.80
C	0.941	1.12	1.31	1.50	1.69	2.25

Brass Solid Plug

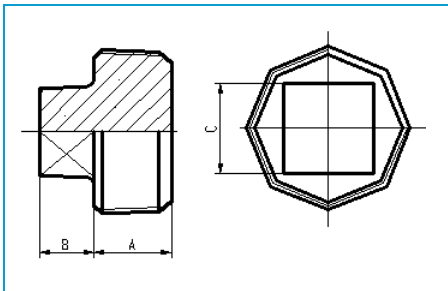

Size	1/2	3/4	1	1-1/4	1-1/2	2
A	0.54	0.55	0.69	0.71	0.73	0.76
B	0.38	0.44	0.50	0.55	0.56	0.62
C	0.56	0.62	0.81	0.94	1.12	1.31
Size	2-1/2	3	4			
A	1.08	1.16	1.26			
B	0.77	0.83	1.02			
C	1.45	1.63	2.17			

Brass Countersunk Plug

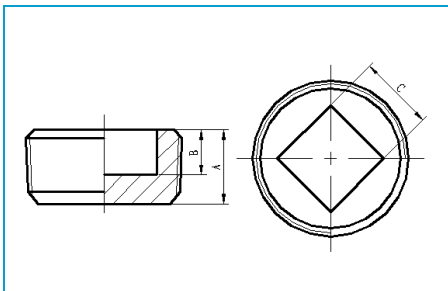

Size	1/2	3/4	1	1-1/2
A	0.54	0.55	0.71	0.73
B	0.38	0.44	0.60	0.62
C	0.37	0.50	0.50	0.75
Size	2	2-1/2	3	4
A	0.76	1.08	1.13	1.22
B	0.68	0.91	0.80	0.99
C	0.87	1.25	1.38	2.12