


UP969* 1/2"-2"



Tested and Certified by IAPMO R&T to NSF/ANSI 61 and NSF/ANSI 372 for lead free compliance.

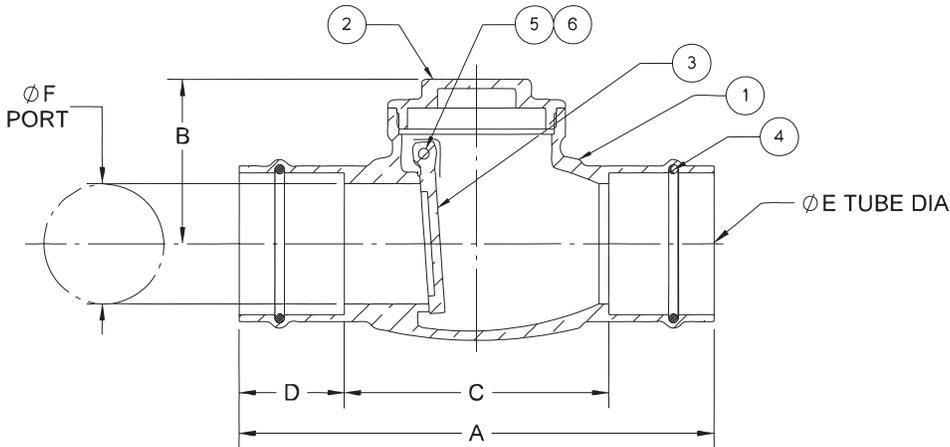

* Ultra Press Valves are designed and qualified for use in copper tubing systems only, Types K, L, & M per ASTM B88. For installation instructions please see engineering section on website.

SPECIFICATIONS

UP969	Designed & Manufactured in accordance with MSS SP-80, Type 3, Press End.
-------	--

ITEM	MATERIAL LIST		
1	BODY	BRASS	ASTM B283 C27450
2	CAP	BRASS	ASTM B283 C27450
3	DISC	BRASS	ASTM B283 C27450
4	O-RING	EPDM	
5	PIN	STAINLESS STEEL	ASTM A276 TY. 304
6	SIDE PLUG	BRASS	ASTM B124 C27450

DIMENSIONS - INCHES / MILLIMETERS

UNITS	SIZE	A	B	C	D	E	F
INCHES	1/2"	3.35	1.38	1.7	0.83	0.63	0.5
mm	13	85	35	43	21	16	13
INCHES	3/4"	3.74	1.43	1.75	0.99	0.88	0.75
mm	19	95	36	45	25	23	19
INCHES	1"	4.36	1.74	2.38	0.99	1.13	0.93
mm	25	111	44	61	25	29	24
INCHES	1-1/4"	4.97	1.99	2.92	1.02	1.38	1.24
mm	31	126	51	74	26	35	32
INCHES	1-1/2"	6.13	2.28	3.3	1.42	1.63	1.38
mm	38	156	58	84	36	42	35
INCHES	2"	7.16	2.48	3.99	1.59	2.13	1.81
mm	50	182	63	101	40	54	46

Milwaukee Valve Company
16550 W. Stratton Drive
New Berlin, WI 53151
Phone: 262-432-2700
Fax: 262-432-2701

Note: Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤ 0.25%. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the Technical/Service Information section on our website. For the most current information access www.milwaukeevalve.com

