



ADAPTERS

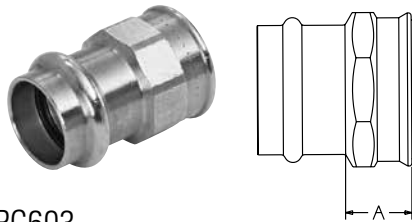


PC603
Adapter P x F – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES
1/2	.097	13/16
1/2 x 3/8	.081	21/32
1/2 x 3/4	.151	31/32
3/4	.162	27/32
3/4 x 1/2	.153	25/32
1	.237	15/16
1 x 1/2	.129	3/4
1 x 3/4	.217	13/16
1 x 1 1/4	.436	13/16
1 1/4	.372	1 1/16
1 1/4 x 1	.302	1 1/16
1 1/4 x 1 1/2	.602	2 7/32
1 1/2	.518	1 1/16
1 1/2 x 1 1/4	.648	1
2	.714	1
2 1/2	1.222	1 13/32
3	1.884	1 23/32
4	3.238	1 7/8

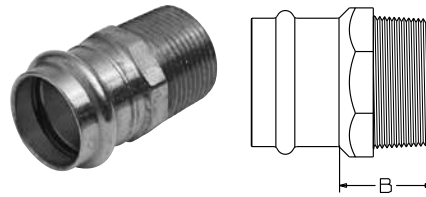

PC604
Adapter P x M – Wrot


NOM. SIZE	APPROX. NET WT./LBS.	DIM. B INCHES
1/2	.106	7/8
1/2 x 3/8	.105	27/32
1/2 x 3/4	.248	1 1/4
3/4	.195	1 1/16
3/4 x 1/2	.189	13/32
1	.268	1 13/32
1 x 3/4	.253	1 1/32
1 x 1 1/4	.662	1 17/32
1 1/4	.467	1 13/32
1 1/4 x 1	.408	1 3/16
1 1/4 x 1 1/2	.630	1 1/2
1 1/2	.696	1 1/2
1 1/2 x 1 1/4	.670	1 3/8
2	.927	1 7/16
2 1/2	1.322	1 27/32
3	2.104	2 1/8
4	3.298	2 9/32

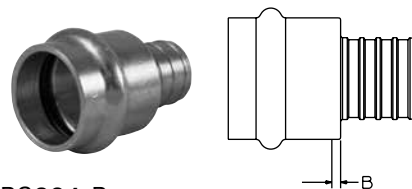

PC604-P
Adapter PEX x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. B INCHES
1/2 x 1/2	.055	1/8
1/2 x 3/4	.108	7/32
3/4 x 1/2	.150	3/32
3/4 x 3/4	.108	5/32
1 x 1	.148	5/32


CAPS

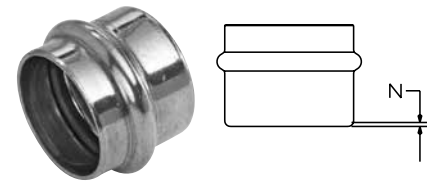

PC617
Cap P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. N INCHES
1/2	.046	5/32
3/4	.091	5/32
1	.125	1/8
1 1/4	.171	1/8
1 1/2	.314	3/16
2	.493	3/16
2 1/2	.476	7/32
3	.713	7/32
4	1.491	1/4

COUPLINGS

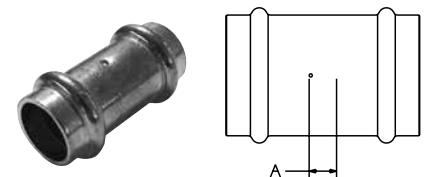

PC600-DS
Coupling P x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES
1/2	.080	3/16
3/4	.153	5/32
1	.190	5/32
1 1/4	.250	5/32
1 1/2	.511	3/16
2	.741	3/16
2 1/2	.669	1/8
3	.979	1/8
4	1.969	7/32

NOTE: Some items not certified by NSF to NSF/ANSI 61. See manufacturer's listing for approved sizes and applications, or contact NIBCO Technical Services for a complete listing of current certifications.

Visit our website for the most current information.