


**Part no. Q4752522, ProPEX EP Reducing Tee, 2 1/2" PEX x 2" PEX x 2" PEX**

ProPEX EP or LF Brass Reducing Tees make diverting connections for Uponor PEX tubing in supply and return mains. Branch size is listed last in the part description.

**Note:** ProPEX Tool is required. ProPEX Rings sold separately.

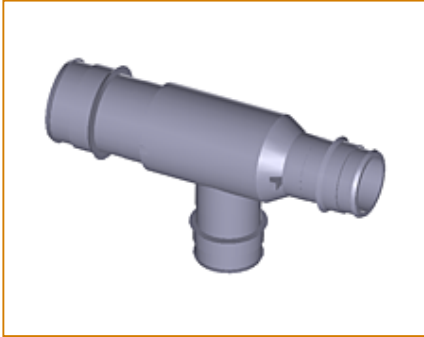

[Specifications](#) | [Technical data](#) | [Product information and application use](#) | [Installation](#) | [Standards](#) | [Codes](#) | [Listings](#) | [Related applications](#) | [Trademark information](#)

## Specifications

<b>Minimum Order</b>	1
<b>Package Type</b>	Bag
<b>Pkg. Qty.</b>	1
<b>Type</b>	Tee
<b>End Type A</b>	EP Shank
<b>End Size A</b>	2 1/2
<b>End Type B</b>	EP Shank
<b>End Size B</b>	2
<b>End Type C</b>	EP Shank
<b>End Size C</b>	2
<b>Length (A)</b>	8.99 in.
<b>Height (B)</b>	4.62 in.
<b>Material</b>	Engineered Polymer
<b>Medium Temperature [Max]</b>	210 °F 99 °C

<b>Working Pressure</b>	150 psi
<b>Weight</b>	0.78 lbs.
<b>Maximum Temperature</b>	320 °F 160 °C

#### Technical data

##### Material:

UDEL<sup>®</sup> Polysulfone, 20% Glass-reinforced (½ to 1")

Acudel<sup>®</sup> Modified Polyphenylsulfone (1¼" to 1½")

Radel<sup>®</sup> R Polyphenylsulfone (2")

Maximum Temperature (no pressure): 320°F (160°C)

Max. Working Temperature/Pressure: 210°F (99°C) at 150 psi (1,034 kPa)

#### Product information and application use

The ProPEX<sup>®</sup> Engineered Polymer (EP) Reducing Tee makes diverting connections for Uponor crosslinked polyethylene (PEX-a) tubing for use in hot and cold domestic potable water systems, residential fire sprinkler systems and hydronic radiant heating and cooling systems. Each end of the tee is manufactured with an Uponor ProPEX fitting for connections to Uponor AquaPEX<sup>®</sup> or Wirsbo hePEX<sup>™</sup> tubing.

Note: Branch size is listed last in the part descriptions.

#### Installation

Use the appropriate ProPEX Ring for PEX-a tubing. Refer to the Uponor AquaPEX<sup>®</sup> Professional Plumbing Installation Guide, AquaSAFE<sup>™</sup> Residential Fire Sprinkler Installation Guide or Uponor Radiant Installation Handbook for additional information.

#### Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

#### Codes

IPC; UPC; NSPC; NPC of Canada

#### Listings

NSF U.P. CODE; ANSI/NSF 14- and 61-certified; HUD MR 1269; ICC ESR 1099; UL 1821 and ULC/ORD-C199P (except Q4757563)

Related applications -

PEX-a Plumbing Systems  
Hydronic Radiant Heating and Cooling Systems  
Snow and Ice Melting Systems  
Turf Conditioning Systems  
Permafrost Protection Systems  
AquaSAFE Fire Safety Systems

Trademark information -

ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.