



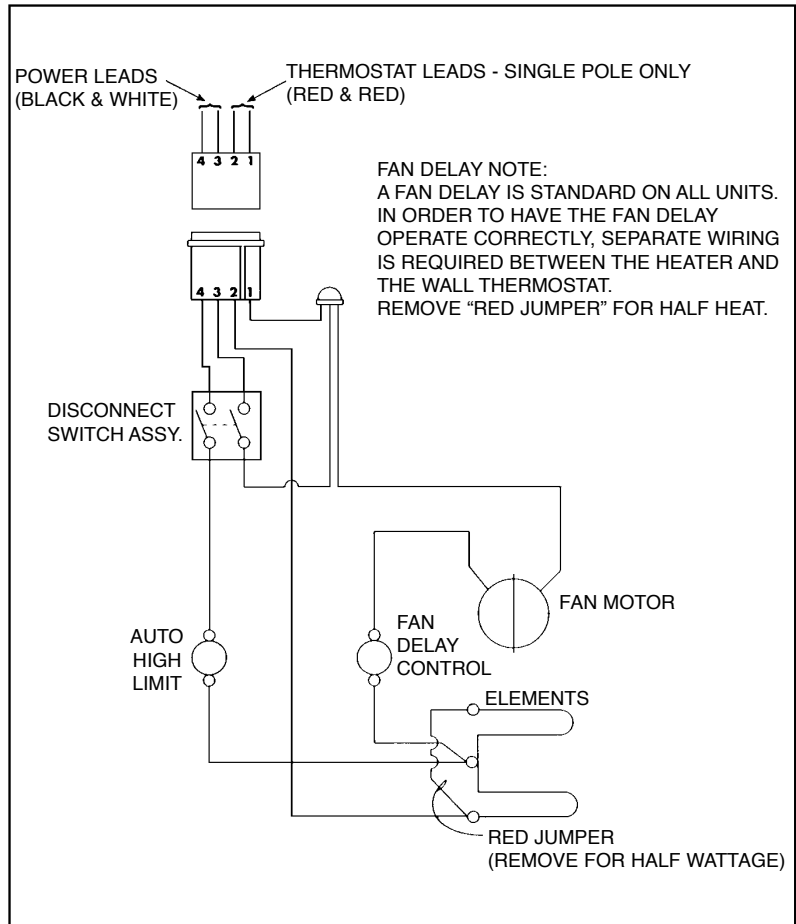

TYPE QCH CEILING MOUNTED FAN FORCED HEATERS

- QCH type fan forced mounted heaters are designed for dens, basements, converted attics, breeze ways, garages, bathrooms, small offices, workshops and similar areas. Also adaptable to multiple installations in somewhat larger or odd shaped rooms.
- Models from 500 to 2000 watts (1706 to 6826 BTU/hr.) provide outstanding performance.
- The basic unit is designed for recessed installation, but is easily adapted for surface mounting with the use of the optional surface mounting frame.
- Rugged steel fins are copper-brazed to the low watt density, steel sheathed, tubular heating elements which are arranged in a uniform pattern.
- Room temperature is controlled by a remote wall thermostat which must be purchased separately.
- A thermal cutout shuts off the heater in the event of overheating.
- UL Listed, File #E21609.

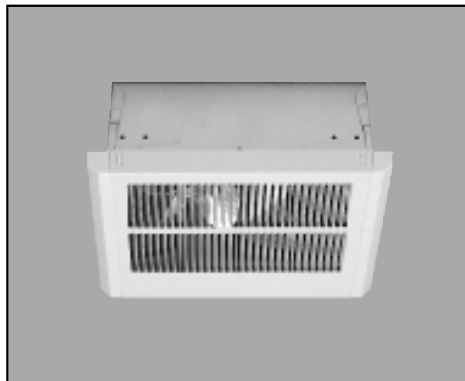

CATALOG NO.	VOLTS	WATTS*	BTU/HR	AMPS
QCH-1101	120	1000/500	3413	8.3
QCH-1151	120	1500/750	5120	12.5
QCH-1202	240/208	2000/1500	6826/5119	8.4/7.2
QCH-1207	277/240	2000/1500	6826/5119	7.2/6.3

*Factory wired for full wattage, filed convertible to half wattage.

ACCESSORIES

CATALOG NO.	DESCRIPTION
QCH-SM	Surface mounting sleeve
QCHS1	1" Semi-recessed frame
QCHS2	2" Semi-recessed frame
QCHTBF	T-bar frame kit