

Hot water without the wait

Before Grundfos, hot water recirculation solutions were difficult, if not impossible. Now, installations in both new construction and existing homes are quick, easy and profitable.

Features & Benefits:

- Installations take an hour or less
- In retrofits, the Comfort System bypass valve makes it all possible with no return line and no need for electricity under the sink
- Uses less energy than a 25-watt light bulb (Comfort System Only)
- Can save up to 16,000 gallons of water per year
- Backed by a 30-month warranty
- All products comply with NSF-61 and AB 1953 standards



Comfort System

**UP 15-10 SU7P TLC
(Part# 595916)**

Pump, valve, line-cord,
and (2) S.S. flex hoses.



UP 10-16

**UP 10-16BN5 ATLC
(Part# 97525921)**

Built-in timer, line-cord,
and aquastat

– Comfort System UP 15-10 SU7P TLC (Part# 595916)

Pump Technical Data:

Flow Range:	0 to 6.5 U.S. GPM
Head Range:	0 to 6.0 U.S. Feet
Motor:	Single Phase, 115V
Min. Fluid Temperature:	36°F (2°C)
Max. Fluid Temperature:	150°F (66°C)
Max. Working Pressure:	145 PSI

Electrical Data:

Volts:	1X115V
Watts:	25W
Amps:	0.23A

Approvals:




Electrical Connection: The pump is fitted with a 10 foot cord and 115V plug.

Timer: 3 control options available:

- Continuous
- 15-minute intervals
- OFF

Performance Curve:

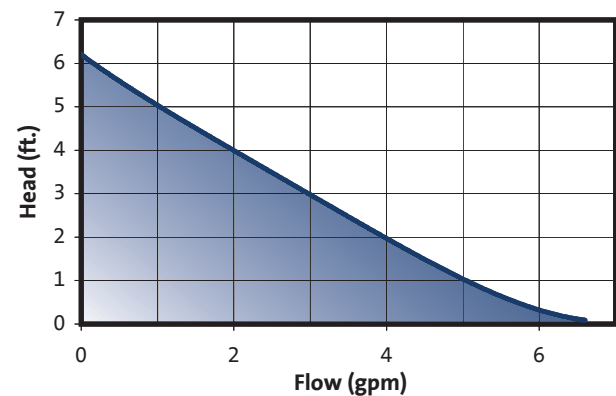


– UP 10-16

Pump Technical Data:

Flow Range:	0 to 3.5 U.S. GPM
Head Range:	1 to 5 U.S. Feet
Motor:	25W, Single Phase, 115V
Min. Fluid Temperature:	36°F (2°C)
Max. Fluid Temperature:	203°F (95°C)
Max. Working Pressure:	145 PSI
Standard Features:	5ft. line-cord w/plug
Optional Features:	Timer, Aquastat

Performance Curve:

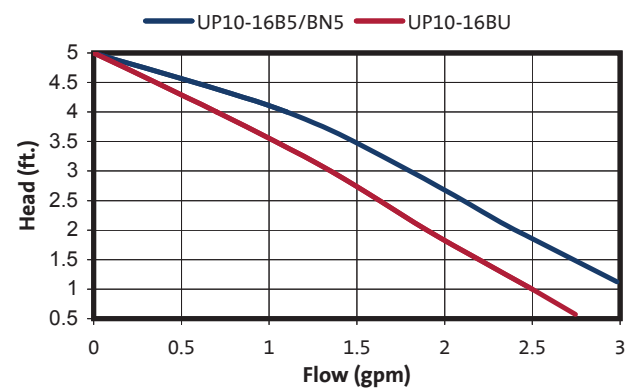

Models	Part Number	1/2" Sweat	1/2" F NPT	1 1/4" Union	Line Cord	Timer	Aquastat	Check Valve	Isolation Valve
UP10-16B5 LC	97525905	•			•				
UP10-16B5 TLC	97525907	•			•	•			
UP10-16B5 ATLC	97525908	•			•	•	•		
UP10-16BN5 LC	97525909		•		•				
UP10-16BN5 TLC	97525910		•		•	•			
UP10-16BN5 ATLC	97525921		•		•	•	•		
UP10-16BU ATLC	97525922			•	•	•	•	•	•