


UTILITY LIGHTING, LAMP PROTECTION, AND LAMP CHANGERS

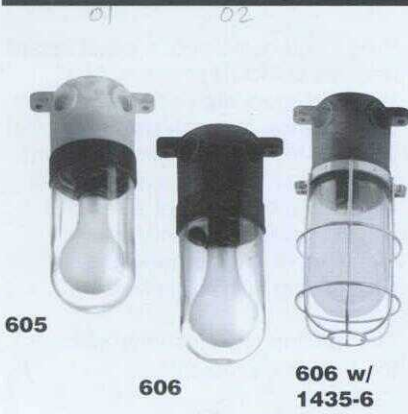

Incandescent Utility Lights

Ideal for food processing plants, barns, garages, warehouses, and workshops. Low cost, corrosion-resistant, enclosed utility lights, complete with base, wiring box, and globe, are convenient to use. Fasten them directly to walls, ceilings, or structural members — no separate outlet box required. Glass or plastic globes screw out for easy replacement of A-21 bulbs (not included) up to 150 watts. High quality materials and sockets assure long, trouble-free service life.

- UL Listed
- CSA Certified versions available
- 3 1/2" diameter; 9 1/2" height
- Two 5/16" diameter mounting holes on 4 3/8" centers
- Moisture-resistant construction with no exposed metal parts
- Large wiring compartment for easy wiring
- Super strong, impact-resistant, thermoplastic mounting unit
- For use up to 100°F ambient temperature
- Accommodates up to 150 Watts maximum domestic A-21 bulbs
- For use with either 1/2" or 3/4" rigid non-metallic conduit

Incandescent Utility Lights

	Wiring Compartment	Supply Wire Rating	Cat. No. 1/2" Threaded Conduit Opening	Cat. No. 3/4" Threaded Conduit Opening
Utility light with glass globe				
for damp locations	15 cubic inch	125°C	600	601
for damp locations	12 cubic inch	60°C	603	604
sealed unit for wet locations	12 cubic inch	60°C	605	606
Utility light with clear plastic globe*				
for damp locations	15 cubic inch	125°C	640	641
for damp locations	12 cubic inch	60°C	643	644
Utility light with red plastic globe*				
for damp locations	15 cubic inch	125°C	650	651
for damp locations	12 cubic inch	60°C	653	654

*Plastic globes max. 75 watt base-up mounting.

Accessories and Replacement Parts

	Cat. No.
Protective metal cage for glass globes only	1435-6
Base and socket only for 600, 640, and 650	610
Base and socket only for 601, 641, and 651	611
Base and socket only for 603	5213-0623
Base and socket only for 604	5213-0672
Base, socket, and seal assembly only for 605	5213-0637
Base, socket, and seal assembly only for 606	5213-0638
Socket only for 15 cubic inch wiring compartment	600-3
Socket only for 12 cubic inch wiring compartment	606-3
Glass globe only for 600, 601, 603, and 604 - 6 11/16" long	0753
Glass globe only for 605 and 606 - 6 11/16" long	0753-HR*
Clear plastic globe only - 6 1/8" long	649
Red plastic globe only - 6 1/8" long	659
Green plastic globe only - 6 1/8" long	669

*Heat resistant globes required for wet locations.

Additional plastic globes available - see page 24