


Threaded Hub, Zinc Die Cast

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed

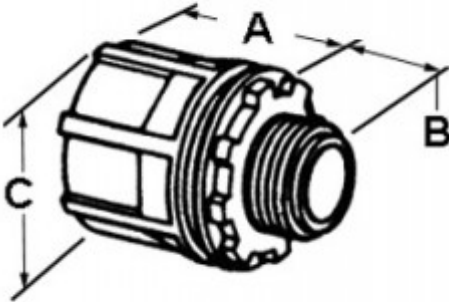

[Download Photo](#)

[Download Drawing](#)

Dimensional Data				Product Information	
Catalog Number	DIM. A	DIM. B	DIM. C	UPC Item number	Trade Size
151-DC	13/16	9/16	1-1/8	09151	1/2"
152-DC	15/16	5/8	1-1/4	09152	3/4"
153-DC	1-1/16	3/4	1-5/8	09153	1"
154-DC	1-3/16	3/4	1-15/16	09154	1-1/4"
155-DC	1-1/4	13/16	2-3/16	09155	1-1/2"
156-DC	1-1/4	7/8	2-3/4	09156	2"
157-DC	1-5/8	15/16	3-1/4	09157	2-1/2"
158-DC	1-5/8	15/16	3-13/16	09158	3"
159-DC	1-11/16	15/16	4-5/16	09159	3-1/2"
160-DC	1-11/16	15/16	4-3/4	09160	4"

Product details

Catalog Number:	grp-151DC-160DC
UPC Number:	781747091512
Primary Materials:	Zinc Die Cast
Finish:	Ball burnished, mirror smooth

Certifications & Codes

Federal Specification Number: A-A-50553

UL File Number: E9391

CSA File Number: LR39354

UNSPSC: 39121311

Nema Standard: FB-1

UL Standard: UL-514B