



Specification grade HID floodlight with cutting edge design, architectural quality, superior features and mounting options at competitive prices.

Color: Bronze

Weight: 19.8 lbs

Project:

Type:

Prepared By:

Date:

#### Lamp Info

|             |          |
|-------------|----------|
| Type        | ED17     |
| Watts       | 150.00W  |
| Shape/Size  | N/A      |
| Base        | N/A      |
| ANSI        | N/A      |
| Hours       | 15,000   |
| Lamp Lumens | 14,000   |
| Efficacy    | 75.7 LPW |

#### Ballast Info

|             |           |
|-------------|-----------|
| Type        | HX-HPF QT |
| 120V        | 1.3/1.6A  |
| 208V        | 1.0/1.0A  |
| 240V        | .7/.8A    |
| 277V        | .6/.7A    |
| Input Watts | 185.00W   |
| Efficiency  | 81%       |

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. Suitable for ground mounting.

### Construction

#### Housing:

Precision die cast aluminum. 1/2" NPS locking Swivel Arm, Wall Bracket Trunnion or Slip Fitter.

#### Reflector:

Anodized aluminum. Field adjustable beam spread. Rotates 90° for horizontal or vertical lamp position.

#### Lens Frame & Glare Shield:

Precision die cast aluminum. Hinged for easy access. Phillips head screws for added security.

#### Finish:

Formulated for high durability and long-lasting color

#### Lens:

Thermal tempered shock resistant glass, 3/16" thick

#### Lens Gasket:

High-temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

#### Ground Mounting:

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation

#### EPA:

Maximum EPA 1.1

### Electrical

#### Socket:

HID Porcelain 4kv Pulse Rated socket with nickel plated screw shell CFL Plug in type, GX24q-4 base

#### Pulse Start:

Pulse Start metal halide for increased lamp life, lumen maintenance, color uniformity and efficiency

### Other


#### Patents:

Pat. D545,472

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

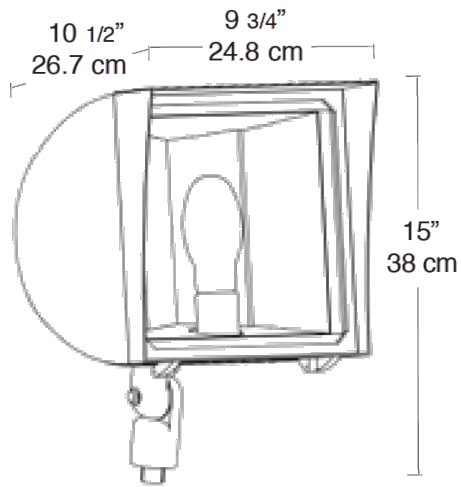

## Features

- Integra hood glare shield for friendly lighting when properly aimed
- Silicone gasket for durable weatherproofing & easy relamping
- Precision die cast aluminum housing and lens frame with durable polyester powder coating
- Anodized aluminum reflector rotates for horizontal or vertical lamp position
- Medium base 4kv pulse rated socket
- Two field adjustable socket positions allow fine tuning of beam spread)
- Fins for heat dissipation extend lamp and ballast life