

PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- **Impact resistant**, can handle demanding construction site environments
- Omnidirectional light distribution
- Lightweight design with high output
- **US cord+plug, linkable up to 600W Max**
- **IP64** water and dust resistant
- **6kV** surge protection built in
- Available with **extended cord** options
- **50,000-Hour** lifespan
- **120V**
- **5-Year, No-Compromise Warranty**

LED Temporary Work Light



PERFORMANCE

Catalog Number	Equivalency	Input Wattage	Lumen	Cord Length	Efficacy lm/W	Color Temperature	CRI	L70 Lifespan
TEMP-60-850	250W HID	60W	7200	6'	120	5000K	80	50,000
TEMP-100-850	400W HID	100W	12000	6'	120	5000K	80	50,000
TEMP-150-850	600W HID	150W	18000	6'	120	5000K	80	50,000
TEMP-60-850/15CP	250W HID	60W	7200	15'	120	5000K	80	50,000
TEMP-100-850/25CP	400W HID	100W	12000	25'	120	5000K	80	50,000
TEMP-150-850/35CP	600W HID	150W	18000	35'	120	5000K	80	50,000

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type HID	Base Type US Plug
Bulb Shape Temporary Work Light	Beam Angle 360°
Enclosure Material Polycarbonate	
Enclosure Finish Construction Orange	

COMPLIANCE

Safety Listing UL listed, UL classified
Environment/Fixture Rating Damp / UL enclosed
FCC Complies with Part 15 of the FCC Rules.
RoHS Mercury and UV free. RoHS-compliant components.
IP Rating IP64

TECHNICAL SPECIFICATIONS (CONT.)

INSTALLATION METHOD

US 18AWG gauge cord and 3 prong plug. Linkable up to 600W Max.

ELECTRICAL

THD

<20%

Power Factor

>0.9

Input Voltage

120V

Operating Frequency

60Hz

Operating Temperature

-22°F to 140°F (-30°C to 60°C)

Note

All values are typical (tolerance +/- 10%)

OTHER

Warranty



RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

DIMENSIONS



TEMP 60W

Weight: 4 lbs

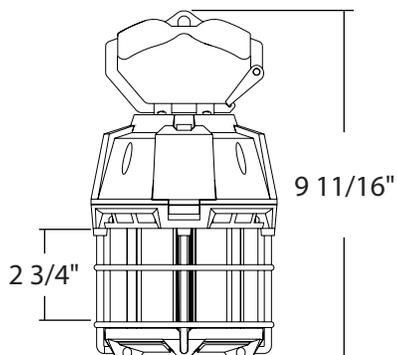



TEMP 100W

Weight: 5.6 lbs

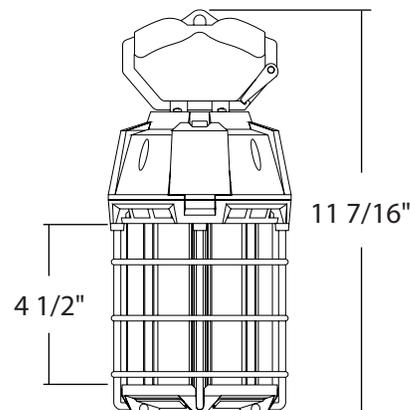

TEMP 150W

Weight: 6.8 lbs

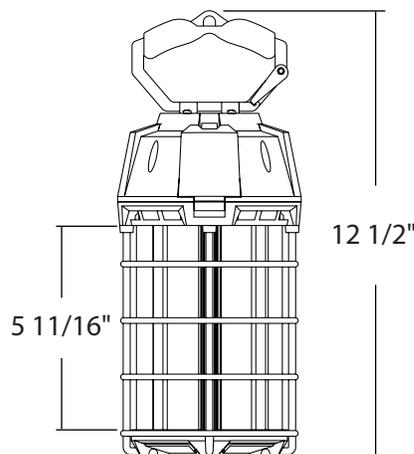

ORDERING INFO

Catalog Number	Model Number (DLC/Energy Star)	UPC	Case Pack
TEMP-60-850	H10040(TEMP-60-850)	019813908434	4
TEMP-100-850	H10041(TEMP-100-850)	019813908441	4
TEMP-150-850	H10042(TEMP-150-850)	019813908458	4
TEMP-60-850/15CP	H10076(TEMP-60-850/15CP)	192552005272	4
TEMP-100-850/25CP	H10077(TEMP-100-850/25CP)	192552005289	4
TEMP-150-850/35CP	H10078(TEMP-150-850/35CP)	192552005296	4

ORDERING MATRIX

Family	Wattage	CRI/Color Temp	Cord Plug
TEMP	-	- 850	
	150 150W	850 80 CRI, 5000K	Blank 6 feet cord and plug
	100 100W		/15CP 15 feet cord plug
	60 60W		/25CP 25 feet cord plug
			/35CP 35 feet cord plug